

<p align="center"><b>TEST REPORT</b>  <b>IEC 62368-1</b>  <b>Audio/video, information and communication technology equipment</b>  <b>Part 1: Safety requirements</b></p>	
<p><b>Report reference No.</b> ..... : 20CH-01046.S02  <b>Date of issue</b> ..... : 2020-08-17  <b>Total number of pages</b> ..... : 65  <b>CB Testing Laboratory</b> ..... : Eurofins Electric &amp; Electronic Product Testing AG  <b>Address</b> ..... : Luppmenstrasse 3, 8320 Fehraltorf  SWITZERLAND</p>	
<p><b>Applicant's name</b> ..... : NetModule AG  <b>Address</b> ..... : Maulbeerstrasse 10, 3011 Bern  SWITZERLAND</p>	
<p><b>Test specification</b> ..... :  <b>Standard</b> ..... : IEC 62368-1:2014 (Second Edition)  <b>Test procedure</b> ..... : Type testing for CE  <b>Non-standard test method</b> ..... : N/A</p>	
<p><b>Test Report Form No.</b> ..... : IEC62368_1B  <b>Test Report Form(s) Originator</b> ..... : UL(US)  <b>Master TRF</b> ..... : 2014-03</p>	
<p><b>Copyright © 2014 Worldwide System for Conformity Testing and Certification of Electrotechnical Equipment and Components (IECEE), Geneva, Switzerland. All rights reserved.</b>  This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.  <b>This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.</b></p>	
<p><b>General disclaimer:</b>  The test results presented in this report relate only to the object tested.  This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.</p>	
<b>Test Item description</b> .....	NG800 - Multifunctional IoT-Device
<b>Trade Mark</b> .....	NetModule
<b>Manufacturer</b> .....	NetModule AG Maulbeerstrasse 10, 3011 Bern SWITZERLAND
<b>Model/Type reference</b> .....	NG800
<b>Ratings</b> .....	12 - 24 V <sub>~</sub> , 0.9 A, 10 W

<input checked="" type="checkbox"/>	<b>CB Testing Laboratory:</b>	Eurofins Electric & Electronic Product Testing AG
Testing location/ address .....		Luppenstrasse 3, 8320 Fehraltorf SWITZERLAND
<input type="checkbox"/>	<b>Associated CB Testing Laboratory:</b>	
Testing location/ address .....		
Tested by (name + signature) .....		Robert Kaufmann Project Engineer
Approved by (name + signature) .....		Lukas Inhelder Project Engineer
<input type="checkbox"/>	Testing procedure: TMP/CTF Stage 1	
Testing location/ address .....		
Tested by (name + signature) .....		
Approved by (name + signature) .....		
<input type="checkbox"/>	Testing procedure: WMT/CTF Stage 2	
Testing location/ address .....		
Tested by (name + signature) .....		
Witnessed by (name + signature) .....		
Approved by (name + signature) .....		
<input type="checkbox"/>	Testing procedure: SMT/CTF Stage 3 or 4	
Testing location/ address .....		
Tested by (name + signature) .....		
Approved by (name + signature) .....		
Supervised by (name + signature) .....		

**List of Attachments (including a total number of pages in each attachment):**

- Appendix List of Test Equipment: 1 page
- ATTACHMENT TO TEST REPORT IEC 62368-1, EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES: 9 pages
- Appendix Photo Documentation: 3 pages

**Summary of testing:**

The equipment complies with this standard.

**Tests performed (name of test and test clause):****Complete test performed**

- 4.1.2.....:List of critical components
- 5.2.....: Classification of electrical energy sources
- 5.4.1.4.....: Temperature measurements
- 5.4.2/.3.....: Minimum Clearances/Creepage distance
- 5.4.9.....:Electric strength tests
- 6.2.2.....:Electrical power sources (PS) measurements for classification
- 6.2.3.....:Determination of Potential Ignition Sources
- B.2.5.....: Input test
- B.3.....:Abnormal operating condition tests
- B.4.....:Fault condition tests
- T.2/.3/.4/.5...:Steady force test
- T.6/.9.....:Impact tests
- T.8.....:Stress relief test

**History of changes**

The test report No. 20CH-01046.S02 replaces the test report No. 19-EL-0024.S02, dated 2019-05-28.

Changes dated 2020-07-28:

- Test Item Particulars:  
Maximum operating ambient temperature increased to 85 ° C (from revision A01 onwards, revision with ASA/PC enclosure material never went into series production)
- List of critical components:  
Plastic material of enclosure added
- Temperature measurements:  
Calculated temperatures adjusted
- Tests T.3/.5/.6/.8 repeated

**Testing location:**

Eurofins Electrosuisse Product Testing AG  
Albisriederstrasse 199, 8047 Zürich  
SWITZERLAND

(SAS accreditation no. STS 0001)

Eurofins Electric & Electronic Product Testing AG  
Albisriederstrasse 199, 8047 Zürich  
SWITZERLAND

(SAS accreditation no. STS 0001)

**Summary of compliance with National Differences:**

List of countries addressed: CENELEC

☒ The product fulfils the requirements of EN 62368-1:2014+A11:2017**Copy of marking plate:**

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.



Model Differences see page 8

TEST ITEM PARTICULARS:	
Classification of use by .....	<input checked="" type="checkbox"/> Ordinary person <input type="checkbox"/> Instructed person <input type="checkbox"/> Skilled person <input type="checkbox"/> Children likely to be present
Supply Connection .....	<input type="checkbox"/> AC Mains <input checked="" type="checkbox"/> DC Mains <input type="checkbox"/> External Circuit - not Mains connected - <input checked="" type="checkbox"/> ES1 <input type="checkbox"/> ES2 <input type="checkbox"/> ES3
Supply % Tolerance .....	<input type="checkbox"/> +10 %/-10 % <input type="checkbox"/> +20 %/-15 % <input checked="" type="checkbox"/> +50 %/-25 % <input type="checkbox"/> None
Supply Connection – Type .....	<input type="checkbox"/> pluggable equipment type A - <input type="checkbox"/> non-detachable supply cord <input type="checkbox"/> appliance coupler <input type="checkbox"/> direct plug-in <input type="checkbox"/> mating connector <input type="checkbox"/> pluggable equipment type B - <input type="checkbox"/> non-detachable supply cord <input type="checkbox"/> appliance coupler <input type="checkbox"/> permanent connection <input checked="" type="checkbox"/> mating connector <input type="checkbox"/> other:_____
Considered current rating of protective device as part of building or equipment installation.....	3 A; Installation location: <input checked="" type="checkbox"/> building/wiring; <input type="checkbox"/> equipment
Equipment mobility .....	<input type="checkbox"/> movable <input type="checkbox"/> hand-held <input type="checkbox"/> transportable <input type="checkbox"/> stationary <input checked="" type="checkbox"/> for building-in <input type="checkbox"/> direct plug-in <input type="checkbox"/> rack-mounting <input checked="" type="checkbox"/> wall-mounted
Over voltage category (OVC) .....	<input type="checkbox"/> OVC I <input type="checkbox"/> OVC II <input type="checkbox"/> OVC III <input type="checkbox"/> OVC IV <input checked="" type="checkbox"/> other: vehicle based equipment
Class of equipment .....	<input type="checkbox"/> Class I <input type="checkbox"/> Class II <input type="checkbox"/> Class III
Access location .....	<input type="checkbox"/> restricted access location <input checked="" type="checkbox"/> N/A
Pollution degree (PD) .....	<input type="checkbox"/> PD 1 <input checked="" type="checkbox"/> PD 2 <input type="checkbox"/> PD 3
Manufacturer's specified maximum operating ambient	75 °C / from revision A01 onwards 85 °C
IP protection class .....	<input checked="" type="checkbox"/> IPX0 <input type="checkbox"/> IP65
Power Systems .....	<input type="checkbox"/> TN <input type="checkbox"/> TT <input type="checkbox"/> IT - ____ V <sub>L-L</sub>
Altitude during operation (m) .....	<input type="checkbox"/> 2000 m or less <input checked="" type="checkbox"/> 4000 m
Altitude of test laboratory (m) .....	<input checked="" type="checkbox"/> 2000 m or less <input type="checkbox"/> ____ m
Mass of equipment (kg) .....	<input checked="" type="checkbox"/> 0.52 kg
POSSIBLE TEST CASE VERDICTS:	
- test case does not apply to the test object.....	N/A
- test object does meet the requirement.....	P (Pass)
- test object does not meet the requirement.....	F (Fail)
TESTING:	
Date of receipt of test item .....	2020-06-19
Date (s) of performance of tests .....	2020-06-19 to 2020-08-17

**GENERAL REMARKS:**

"(See Enclosure #)" refers to additional information appended to the report.

"(See appended table)" refers to a table appended to the report.

Throughout this report a ☐ comma / ☒ point is used as the decimal separator.

**Manufacturer's Declaration per sub-clause 4.2.5 of IEC60335-1:**

The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided.....

☐ **Yes**  
☒ **Not applicable**

**When differences exist; they shall be identified in the General product information section.**

**Name and address of factory (ies) .....**


ml&s GmbH & Co. KG  
 Siemensallee 1  
 17489 Greifswald  
 GERMANY

### Product Description –

The telematic system platform provides the necessary robust communication between onboard vehicle equipment and cloud applications suitable for harsh environments. The modular architecture of software, electronics and mechanical components can be tailored for a wide range of applications such as asset tracking, condition monitoring and vehicle diagnostics up to driving optimization, driving assistance, accident prevention and recording and even autonomous driving.

The Molex CMC 48 pin connector serves for all wired interfaces such as BroadR-Reach, Fast Ethernet and RS-232 serials. This basic functionality may be extended with an application specific user module.

V2.0  
23.10.2018/rs

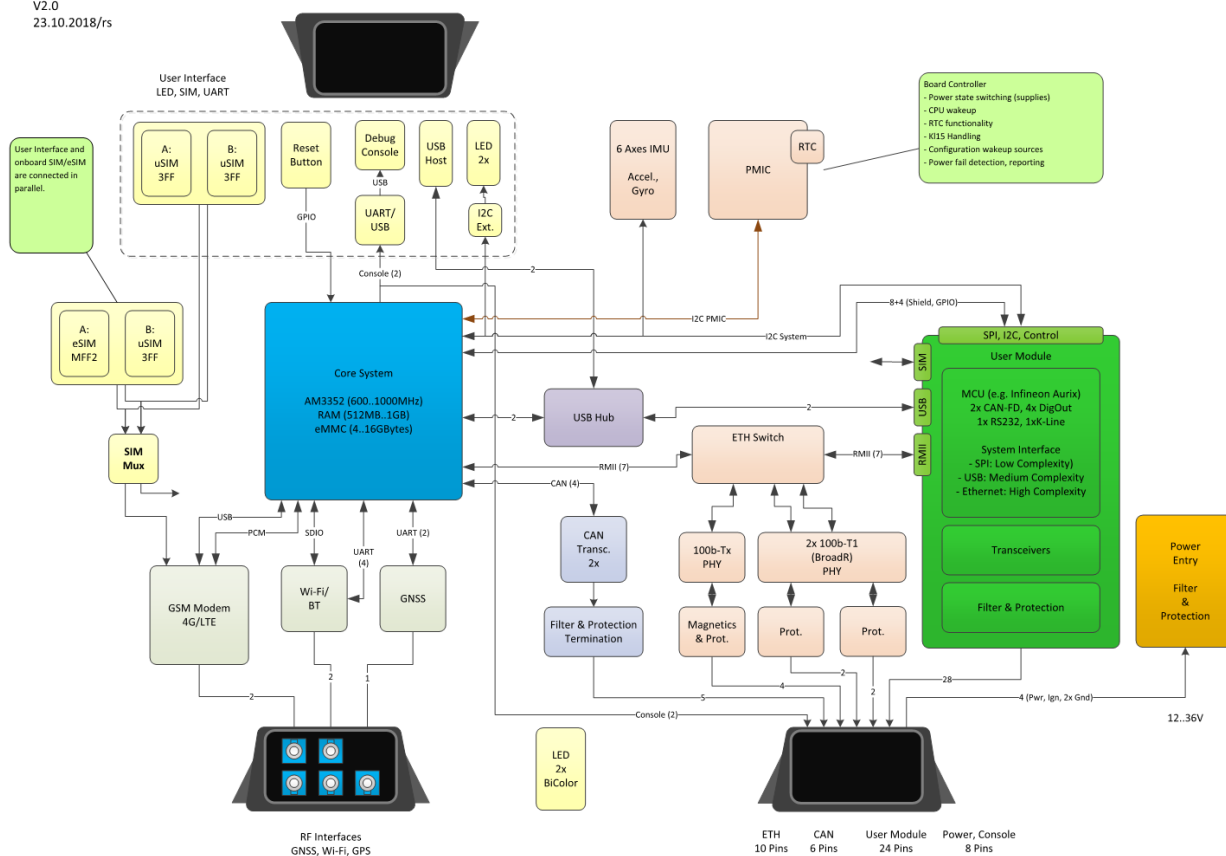

TRF No. IEC62368 1B

**Model Differences –**

Note: Depending on the implemented radio modules, additional letters and numbers may be added to “NG800”.

Tested Equipment	Covered Variants	Explanation <sup>1)</sup>
NG800-LWWtGe2Br2C	NG800-H <sub>1</sub> ...H <sub>n</sub> -S <sub>1</sub> ...S <sub>n</sub> -O <sub>1</sub> ...O <sub>n</sub>	<p>All covered NG800 variants are based on the same electronics. They use the same housing and have the same form factor.</p> <p>The tested device is the fully equipped variant. Whereas the other variants are subsets of this device. The subsets are assembly options of the electronics.</p> <p>All products include Ethernet and RS232. Additionally, there can be automotive Ethernet (100bT1 BroadR) and Controller Area Network (CAN) wired interfaces. Optional wireless interfaces are 4G mobile, WLAN, Bluetooth and GNSS. Future product variants can be equipped with an extension PCB (user module) that provides further processing functions, wired or wireless interfaces. The wireless communication modules have been CE and FCC certified in an independent way of the tested equipment.</p> <p>‘H<sub>1</sub>...H<sub>n</sub>’ is a sequence of the following letters that identify the communication modules included:</p> <p>R     basic device, router only  L     4G = 3G + LTE, Cat. 4, Europe  Lb    4G, LTE Cat. 4, North America  Lf    4G, LTE Cat. 4, South America  Lg    4G, LTE Cat. 4, Asia Pacific (APAC)  Lm    4G, LTE Cat M1/NB1, Multiregional  W     WLAN a/b/g/n 2.4/5 GHz  Wb    WLAN b/g 2.4 GHz  Wt    Bluetooth + BLE  WWt   WLAN + Bluetooth + BLE  C     Controller Area Network CAN  Br    100bT1 BroadR-Reach  Ga    GNSS advanced  Gd    GNSS untethered dead reckoning  Ge    GNSS automotive dead reckoning  Gf    GNSS differential GPS</p> <p>‘S<sub>1</sub>...S<sub>n</sub>’ indicate the software options activated:</p> <p>G     Standard GPS  V     VoIP Gateway  Y     Plain Linux  Vi    Virtualisation, LXC  ... (more to follow)</p> <p>‘O’ indicates OEM options, customer specific extensions and brand labeling e.g.:</p> <p>OEMa     Customer A  OEMb     Customer B  xyz        any abbreviation of customer with or without number</p>



Tested Equipment	Covered Variants	Explanation <sup>1)</sup>
NG800-LWWtGe2Br2C	NG800-H <sub>1</sub> ...H <sub>n</sub> -S <sub>1</sub> ...S <sub>n</sub> -O <sub>1</sub> ...O <sub>n</sub>	<p>The following NG800 variants are currently available or planned. Lx describes one of the available modem options listed above.</p> <ul style="list-style-type: none"> <li>- NG800-LxWWtGe2Br2C</li> <li>- NG800-LxWWtGe2C</li> <li>- NG800-LxWWtGa2C</li> <li>- NG800-LxWWtGe</li> <li>- NG800-LxWWtGa</li> <li>- NG800-LxGe</li> <li>- NG800-LxGa</li> <li>- NG800-LxWWt</li> <li>- NG800-WWt</li> <li>- NG800-Br2C</li> </ul>
<sup>1)</sup> according to information of the customer and not verified by Eurofins Electrosuisse Product Testing AG		
<b>Additional application considerations – (Considerations used to test a component or sub-assembly)</b> –  None		

<b>ENERGY SOURCE IDENTIFICATION AND CLASSIFICATION TABLE:</b>	
(Note 1: Identify the following six (6) energy source forms based on the origin of the energy.) (Note 2: The identified classification e.g., ES2, TS1, should be with respect to its ability to cause pain or injury on the body or its ability to ignite a combustible material. Any energy source can be declared Class 3 as a worse case classification e.g. PS3, ES3.)	
<b>Electrically-caused injury (Clause 5):</b> (Note: Identify type of source, list sub-assembly or circuit designation and corresponding energy source classification) Example: +5 V dc input	
	ES1
Source of electrical energy	Corresponding classification (ES)
All circuits	ES1
<b>Electrically-caused fire (Clause 6):</b> (Note: List sub-assembly or circuit designation and corresponding energy source classification) Example: Battery pack (maximum 85 watts):	
	PS2
Source of power or PIS	Corresponding classification (PS)
Power input circuits	PS3
Circuits after voltage regulator U5000	PS2
Digital outputs	PS1
<b>Injury caused by hazardous substances (Clause 7)</b> (Note: Specify hazardous chemicals, whether produces ozone or other chemical construction not addressed as part of the component evaluation.) Example: Liquid in filled component	
	Glycol
Source of hazardous substances	Corresponding chemical
Battery	Lithium coin cell
<b>Mechanically-caused injury (Clause 8)</b> (Note: List moving part(s), fan, special installations, etc. & corresponding MS classification based on Table 35.) Example: Wall mount unit	
	MS2
Source of kinetic/mechanical energy	Corresponding classification (MS)
Sharp edges & corners	MS1
Fixed device	MS1
<b>Thermal burn injury (Clause 9)</b> (Note: Identify the surface or support, and corresponding energy source classification based on type of part, location, operating temperature and contact time in Table 38.) Example: Hand-held scanner – thermoplastic enclosure	
	TS1
Source of thermal energy	Corresponding classification (TS)
Accessible surfaces	TS1
<b>Radiation (Clause 10)</b> (Note: List the types of radiation present in the product and the corresponding energy source classification.) Example: DVD – Class 1 Laser Product	
	RS1
Type of radiation	Corresponding classification (RS)
LED indicators	RS1

**ENERGY SOURCE DIAGRAM**

Indicate which energy sources are included in the energy source diagram. Insert diagram below

☐ ES    ☐ PS    ☐ MS    ☐ TS    ☐ RS

OVERVIEW OF EMPLOYED SAFEGUARDS				
Clause	Possible Hazard			
5.1	Electrically-caused injury			
Body Part (e.g. Ordinary)	Energy Source (ES3: Primary Filter circuit)	Safeguards		
		Basic	Supplementary	Reinforced (Enclosure)
Ordinary	ES1: All circuits	N/A	N/A	N/A
6.1	Electrically-caused fire			
Material part (e.g. mouse enclosure)	Energy Source (PS2: 100 Watt circuit)	Safeguards		
		Basic	Supplementary	Reinforced
All combustible materials within equipment fire enclosure	PS3: All circuits	No excessive temp.	Suitable material	N/A
All combustible materials within equipment fire enclosure	PS2: Circuits after voltage regulator U5000	No excessive temp.	Suitable material	N/A
All combustible materials	PS1: Digital outputs	N/A	N/A	N/A
7.1	Injury caused by hazardous substances			
Body Part (e.g., skilled)	Energy Source (hazardous material)	Safeguards		
		Basic	Supplementary	Reinforced
Ordinary	Battery chemical (lithium coin cell)	Enclosure for preventing electrolyte spillage	N/A	N/A
8.1	Mechanically-caused injury			
Body Part (e.g. Ordinary)	Energy Source (MS3:High Pressure Lamp)	Safeguards		
		Basic	Supplementary	Reinforced (Enclosure)
Ordinary	MS1: Sharp edges & corners	N/A	N/A	N/A
Ordinary	MS1: Fixed device	N/A	N/A	N/A
9.1	Thermal Burn			
Body Part (e.g., Ordinary)	Energy Source (TS2)	Safeguards		
		Basic	Supplementary	Reinforced
Ordinary	TS1: Accessible surfaces	N/A	N/A	N/A
10.1	Radiation			
Body Part (e.g., Ordinary)	Energy Source (Output from audio port)	Safeguards		
		Basic	Supplementary	Reinforced
Ordinary	RS1: LED indicators	N/A	N/A	N/A
Supplementary Information: (1) See attached energy source diagram for additional details. (2) "N" – Normal Condition; "A" – Abnormal Condition; "S" Single Fault				

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>4</b>	<b>GENERAL REQUIREMENTS</b>		P
4.1.1	Acceptance of materials, components and subassemblies		P
4.1.2	Use of components		P
4.1.3	Equipment design and construction		P
4.1.15	Markings and instructions .....	(See Annex F)	P
4.4.4	Safeguard robustness		P
4.4.4.2	Steady force tests .....	(See Annex T.4, T.5)	P
4.4.4.3	Drop tests.....	(See Annex T.7)	P
4.4.4.4	Impact tests.....	(See Annex T.6)	P
4.4.4.5	Internal accessible safeguard enclosure and barrier tests .....	No such parts (See Annex T.3)	N/A
4.4.4.6	Glass Impact tests .....	(See Annex T.9, Annex U)	N/A
4.4.4.74	Thermoplastic material tests.....	(See Annex T.8)	P
4.4.4.8	Air comprising a safeguard .....	(See Annex T)	P
4.4.4.9	Accessibility and safeguard effectiveness		P
4.5	Explosion		N/A
4.6	Fixing of conductors		P
4.6.1	Fix conductors not to defeat a safeguard		P
4.6.2	10 N force test applied to .....	Internal wires or components	P
4.7	Equipment for direct insertion into mains socket - outlets	No AC mains	N/A
4.7.2	Mains plug part complies with the relevant standard..		N/A
4.7.3	Torque (Nm).....	---	N/A
4.8	Products containing coin/button cell batteries	No battery compartment, coin cell not replaceable by user	N/A
4.8.2	Instructional safeguard		N/A
4.8.3	Battery Compartment Construction		N/A
	Means to reduce the possibility of children removing the battery .....	---	—
4.8.4	Battery Compartment Mechanical Tests .....	(See Table 4.8.4)	N/A
4.8.5	Battery Accessibility		N/A
4.9	Likelihood of fire or shock due to entry of conductive object .....	No openings	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>5</b>	<b>ELECTRICALLY-CAUSED INJURY</b>		<b>P</b>
5.2.1	Electrical energy source classifications .....	ES1: All circuits (See appended table 5.2)	P
5.2.2	ES1, ES2 and ES3 limits		P
5.2.2.2	Steady-state voltage and current .....	See appended table 5.2)	P
5.2.2.3	Capacitance limits.....	(See appended table 5.2)	N/A
5.2.2.4	Single pulse limits .....	(See appended table 5.2)	N/A
5.2.2.5	Limits for repetitive pulses .....	(See appended table 5.2)	N/A
5.2.2.6	Ringing signals .....	(See Annex H)	N/A
5.2.2.7	Audio signals .....	(See Clause E.1 )	N/A
5.3	Protection against electrical energy sources		P
5.3.1	General Requirements for accessible parts to ordinary, instructed and skilled persons		P
5.3.2.1	Accessibility to electrical energy sources and safeguards		P
5.3.2.2	Contact requirements		P
	a) Test with test probe from Annex V.....	ES1 voltages less than 60 VDC	P
	b) Electric strength test potential (V).....	---	N/A
	c) Air gap (mm) .....	---	N/A
5.3.2.4	Terminals for connecting stripped wire		N/A
5.4	Insulation materials and requirements		P
5.4.1.2	Properties of insulating material		P
5.4.1.3	Humidity conditioning.....	No hygroscopic material (See sub-clause 5.4.8)	N/A
5.4.1.4	Maximum operating temperature for insulating materials .....	Considered to be class 130 (B) (See appended table 5.4.1.4)	P
5.4.1.5	Pollution degree .....	2	—
5.4.1.5.2	Test for pollution degree 1 environment and for an insulating compound		N/A
5.4.1.5.3	Thermal cycling		N/A
5.4.1.6	Insulation in transformers with varying dimensions		N/A
5.4.1.7	Insulation in circuits generating starting pulses		N/A
5.4.1.8	Determination of working voltage		P
5.4.1.9	Insulating surfaces		N/A
5.4.1.10	Thermoplastic parts on which conductive metallic parts are directly mounted		N/A
5.4.1.10.2	Vicat softening temperature .....	(See appended table 5.4.1.10.2)	N/A
5.4.1.10.3	Ball pressure .....	(See appended table 5.4.1.10.3)	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.4.2	Clearances		P
5.4.2.2	Determining clearance using peak working voltage	(See appended table 5.4.2.2)	P
5.4.2.3	Determining clearance using required withstand voltage .....	(See appended table 5.4.2.3)	P
	a) a.c. mains transient voltage.....	---	—
	b) d.c. mains transient voltage .....	---	—
	c) external circuit transient voltage.....	1'500 V <sub>peak</sub> (Ethernet)	—
	d) transient voltage determined by measurement... :	---	—
5.4.2.4	Determining the adequacy of a clearance using an electric strength test	(See appended table 5.4.2.4)	N/A
5.4.2.5	Multiplication factors for clearances and test voltages .....	Up to 4'000 m.a.s.l.	P
5.4.3	Creepage distances.....	(See appended table 5.4.3)	P
5.4.3.1	General		P
5.4.3.3	Material Group .....	IIIb	—
5.4.4	Solid insulation		P
5.4.4.2	Minimum distance through insulation .....	(See appended table 5.4.4.2)	N/A
5.4.4.3	Insulation compound forming solid insulation		N/A
5.4.4.4	Solid insulation in semiconductor devices		N/A
5.4.4.5	Cemented joints		N/A
5.4.4.6	Thin sheet material		N/A
5.4.4.6.1	General requirements		N/A
5.4.4.6.2	Separable thin sheet material		N/A
	Number of layers (pcs) .....	---	N/A
5.4.4.6.3	Non-separable thin sheet material		N/A
5.4.4.6.4	Standard test procedure for non-separable thin sheet material .....	(See appended Table 5.4.9)	N/A
5.4.4.6.5	Mandrel test		N/A
5.4.4.7	Solid insulation in wound components		N/A
5.4.4.9	Solid insulation at frequencies >30 kHz.....	(See appended Table 5.4.4.9)	N/A
5.4.5	Antenna terminal insulation	Certified WLAN & WWAN modules	N/A
5.4.5.1	General		N/A
5.4.5.2	Voltage surge test		N/A
	Insulation resistance (MΩ).....		—
5.4.6	Insulation of internal wire as part of supplementary safeguard .....	(See appended table 5.4.4.2)	N/A
5.4.7	Tests for semiconductor components and for cemented joints		N/A
5.4.8	Humidity conditioning		N/A
	Relative humidity (%).....	---	—

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Temperature (°C) .....	---	---
	Duration (h) .....	---	---
5.4.9	Electric strength test .....	(See appended table 5.4.9)	P
5.4.9.1	Test procedure for a solid insulation type test		P
5.4.9.2	Test procedure for routine tests		N/A
5.4.10	Protection against transient voltages between external circuit		P
5.4.10.1	Parts and circuits separated from external circuits	(See appended table 5.4.9)	P
5.4.10.2	Test methods		P
5.4.10.2.1	General		P
5.4.10.2.2	Impulse test.....	(See appended table 5.4.9)	N/A
5.4.10.2.3	Steady-state test.....	(See appended table 5.4.9)	P
5.4.11	Insulation between external circuits and earthed circuitry.....	(See appended table 5.4.9)	N/A
5.4.11.1	Exceptions to separation between external circuits and earth		N/A
5.4.11.2	Requirements		N/A
	Rated operating voltage $U_{op}$ (V).....	---	---
	Nominal voltage $U_{peak}$ (V).....	---	---
	Max increase due to variation $U_{sp}$ .....	---	---
	Max increase due to ageing $\Delta U_{sa}$ .....	---	---
	$U_{op} = U_{peak} + \Delta U_{sp} + \Delta U_{sa}$ .....	---	---
5.5	Components as safeguards		P
5.5.1	General		P
5.5.2	Capacitors and RC units		N/A
5.5.2.1	General requirement		N/A
5.5.2.2	Safeguards against capacitor discharge after disconnection of a connector .....	(See appended table 5.5.2.2)	N/A
5.5.3	Transformers	Data transformers only (Ethernet interface) (See Annex G.5.3)	N/A
5.5.4	Optocouplers	(See sub-clause 5.4 or Annex G.12)	N/A
5.5.5	Relays	(See Annex G.2)	N/A
5.5.6	Resistors	(See Annex G.10)	N/A
5.5.7	SPD's	(See Annex G.8)	N/A
5.5.7.1	Use of an SPD connected to reliable earthing		N/A
5.5.7.2	Use of an SPD between mains and protective earth		N/A
5.5.8	Insulation between the mains and external circuit consisting of a coaxial cable .....	(See Annex G.10.3)	N/A
5.6	Protective conductor		N/A



IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.6.2	Requirement for protective conductors	Protective earth not required, grounding the base plate is optional	N/A
5.6.2.1	General requirements		N/A
5.6.2.2	Colour of insulation		N/A
5.6.3	Requirement for protective earthing conductors		N/A
	Protective earthing conductor size (mm <sup>2</sup> ) ..... :	---	—
5.6.4	Requirement for protective bonding conductors		N/A
5.6.4.1	Protective bonding conductors		N/A
	Protective bonding conductor size (mm <sup>2</sup> ). ..... :	---	—
	Protective current rating (A) ..... :	---	—
5.6.4.3	Current limiting and overcurrent protective devices		N/A
5.6.5	Terminals for protective conductors		N/A
5.6.5.1	Requirement		N/A
	Conductor size (mm <sup>2</sup> ), nominal thread diameter (mm)..... :	---	N/A
5.6.5.2	Corrosion		N/A
5.6.6	Resistance of the protective system		N/A
5.6.6.1	Requirements		N/A
5.6.6.2	Test Method Resistance (Ω)..... :	(See appended table 5.6.6.2)	N/A
5.6.7	Reliable earthing		N/A
5.7	Prospective touch voltage, touch current and protective conductor current		N/A
5.7.2	Measuring devices and networks		N/A
5.7.2.1	Measurement of touch current..... :	(See appended table 5.7.4)	N/A
5.7.2.2	Measurement of prospective touch voltage		N/A
5.7.3	Equipment set-up, supply connections and earth connections		N/A
	System of interconnected equipment (separate connections/single connection)..... :	---	—
	Multiple connections to mains (one connection at a time/simultaneous connections) ..... :	---	—
5.7.4	Earthed conductive accessible parts ..... :	(See appended Table 5.7.4)	N/A
5.7.5	Protective conductor current		N/A
	Supply Voltage (V)..... :	---	—
	Measured current (mA)..... :	---	—
	Instructional Safeguard..... :	(See F.4 and F.5)	N/A
5.7.6	Prospective touch voltage and touch current due to external circuits		N/A
5.7.6.1	Touch current from coaxial cables		N/A
5.7.6.2	Prospective touch voltage and touch current from external circuits		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.7.7	Summation of touch currents from external circuits		N/A
	a) Equipment with earthed external circuits Measured current (mA)..... :	---	N/A
	b) Equipment whose external circuits are not referenced to earth. Measured current (mA) ..... :	---	N/A
<b>6</b>	<b>ELECTRICALLY- CAUSED FIRE</b>		<b>P</b>
6.2	Classification of power sources (PS) and potential ignition sources (PIS)		P
6.2.2	Power source circuit classifications		P
6.2.2.1	General		P
6.2.2.2	Power measurement for worst-case load fault ... :	(See appended table 6.2.2)	P
6.2.2.3	Power measurement for worst-case power source fault..... :	(See appended table 6.2.2)	P
6.2.2.4	PS1 ..... :	Digital outputs (See appended table 6.2.2)	P
6.2.2.5	PS2 ..... :	Circuits after voltage regulator U5000 (See appended table 6.2.2)	P
6.2.2.6	PS3 ..... :	Power input circuits (See appended table 6.2.2)	P
6.2.3	Classification of potential ignition sources		P
6.2.3.1	Arcing PIS ..... :	No arcing PIS (See appended table 6.2.3.1)	N/A
6.2.3.2	Resistive PIS ..... :	All PIS within fire enclosure (See appended table 6.2.3.2)	P
6.3	Safeguards against fire under normal operating and abnormal operating conditions		P
6.3.1 (a)	No ignition and attainable temperature value less than 90 % defined by ISO 871 or less than 300 °C for unknown materials..... :	(See appended table 5.4.1.5, 6.3.2, 9.0, B.2.6)	P
6.3.1 (b)	Combustible materials outside fire enclosure		N/A
6.4	Safeguards against fire under single fault conditions		P
6.4.1	Safeguard Method		P
6.4.2	Reduction of the likelihood of ignition under single fault conditions in PS1 circuits		P
6.4.3	Reduction of the likelihood of ignition under single fault conditions in PS2 and PS3 circuits		P
6.4.3.1	General		P
6.4.3.2	Supplementary Safeguards		P
	Special conditions if conductors on printed boards are opened or peeled		N/A
6.4.3.3	Single Fault Conditions..... :	(See appended table 6.4.3)	P
	Special conditions for temperature limited by fuse		N/A
6.4.4	Control of fire spread in PS1 circuits		P
6.4.5	Control of fire spread in PS2 circuits		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
6.4.5.2	Supplementary safeguards .....	(See appended tables 4.1.2 and Annex G)	N/A
6.4.6	Control of fire spread in PS3 circuit		P
6.4.7	Separation of combustible materials from a PIS		N/A
6.4.7.1	General .....	(See tables 6.2.3.1 and 6.2.3.2)	N/A
6.4.7.2	Separation by distance		N/A
6.4.7.3	Separation by a fire barrier		N/A
6.4.8	Fire enclosures and fire barriers		P
6.4.8.1	Fire enclosure and fire barrier material properties		P
6.4.8.2.1	Requirements for a fire barrier		N/A
6.4.8.2.2	Requirements for a fire enclosure	Bottom: metal, Cover: UL 94 V-0 material	P
6.4.8.3	Constructional requirements for a fire enclosure and a fire barrier		P
6.4.8.3.1	Fire enclosure and fire barrier openings		P
6.4.8.3.2	Fire barrier dimensions		N/A
6.4.8.3.3	Top Openings in Fire Enclosure: dimensions (mm) .....	No openings	N/A
	Needle Flame test		N/A
6.4.8.3.4	Bottom Openings in Fire Enclosure, condition met a), b) and/or c) dimensions (mm) .....	No openings	N/A
	Flammability tests for the bottom of a fire enclosure .....	---	N/A
6.4.8.3.5	Integrity of the fire enclosure, condition met: a), b) or c).....	No door or cover that can be opened	N/A
6.4.8.4	Separation of PIS from fire enclosure and fire barrier distance (mm) or flammability rating.....	---	N/A
6.5	Internal and external wiring		P
6.5.1	Requirements		N/A
6.5.2	Cross-sectional area (mm <sup>2</sup> ) .....	Min. 0.75 mm <sup>2</sup> (ext. power wiring)	—
6.5.3	Requirements for interconnection to building wiring :	(See Annex Q.)	N/A
6.6	Safeguards against fire due to connection to additional equipment		N/A
	External port limited to PS2 or complies with Clause Q.1		N/A
<b>7</b>	<b>INJURY CAUSED BY HAZARDOUS SUBSTANCES</b>		<b>P</b>
7.2	Reduction of exposure to hazardous substances		P
7.3	Ozone exposure		N/A
7.4	Use of personal safeguards (PPE)		N/A
	Personal safeguards and instructions .....	---	—

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
7.5	Use of instructional safeguards and instructions		N/A
	Instructional safeguard (ISO 7010)..... :	---	—
7.6	Batteries.....:	Lithium coin cell (See Annex M)	P
<b>8</b>	<b>MECHANICALLY-CAUSED INJURY</b>		P
8.1	General		P
8.2	Mechanical energy source classifications	MS1: Fixed device	P
8.3	Safeguards against mechanical energy sources		N/A
8.4	Safeguards against parts with sharp edges and corners		N/A
8.4.1	Safeguards		N/A
8.5	Safeguards against moving parts	No moving parts	N/A
8.5.1	MS2 or MS3 part required to be accessible for the function of the equipment		N/A
8.5.2	Instructional Safeguard..... :	---	—
8.5.4	Special categories of equipment comprising moving parts		N/A
8.5.4.1	Large data storage equipment		N/A
8.5.4.2	Equipment having electromechanical device for destruction of media		N/A
8.5.4.2.1	Safeguards and Safety Interlocks.....:	(See Annex F.4 and Annex K)	N/A
8.5.4.2.2	Instructional safeguards against moving parts		N/A
	Instructional Safeguard.....:	---	—
8.5.4.2.3	Disconnection from the supply		N/A
8.5.4.2.4	Probe type and force (N).....:	---	N/A
8.5.5	High Pressure Lamps		N/A
8.5.5.1	Energy Source Classification		N/A
8.5.5.2	High Pressure Lamp Explosion Test.....:	(See appended table 8.5.5.2)	N/A
8.6	Stability	Fixed device	N/A
8.6.1	Product classification		N/A
	Instructional Safeguard.....:	---	—
8.6.2	Static stability		N/A
8.6.2.2	Static stability test		N/A
	Applied Force..... :	---	—
8.6.2.3	Downward Force Test		N/A
8.6.3	Relocation stability test		N/A
	Unit configuration during 10° tilt..... :	---	—
8.6.4	Glass slide test		N/A
8.6.5	Horizontal force test (Applied Force)..... :	---	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Position of feet or movable parts..... :	---	—
8.7	Equipment mounted to wall or ceiling		N/A
8.7.1	Mounting Means (Length of screws (mm) and mounting surface) .....	---	N/A
8.7.2	Direction and applied force..... :	---	N/A
8.8	Handles strength		N/A
8.8.1	Classification		N/A
8.8.2	Applied Force .....	---	N/A
8.9	Wheels or casters attachment requirements		N/A
8.9.1	Classification		N/A
8.9.2	Applied force .....	---	—
8.10	Carts, stands and similar carriers		N/A
8.10.1	General		N/A
8.10.2	Marking and instructions		N/A
	Instructional Safeguard..... :	---	—
8.10.3	Cart, stand or carrier loading test and compliance		N/A
	Applied force .....	---	—
8.10.4	Cart, stand or carrier impact test		N/A
8.10.5	Mechanical stability		N/A
	Applied horizontal force (N)..... :	---	—
8.10.6	Thermoplastic temperature stability (°C) .....	---	N/A
8.11	Mounting means for rack mounted equipment		N/A
8.11.1	General		N/A
8.11.2	Product Classification		N/A
8.11.3	Mechanical strength test, variable <i>N</i> .....	---	N/A
8.11.4	Mechanical strength test 250N, including end stops	---	N/A
8.12	Telescoping or rod antennas.....	(See Annex T)	N/A
	Button/Ball diameter (mm)..... :	---	—
<b>9</b>	<b>THERMAL BURN INJURY</b>		<b>P</b>
9.2	Thermal energy source classifications	TS1: Accessible surfaces	P
9.3	Safeguard against thermal energy sources		N/A
9.4	Requirements for safeguards		N/A
9.4.1	Equipment safeguard		N/A
9.4.2	Instructional safeguard .....	---	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>10</b>	<b>RADIATION</b>		P
10.2	Radiation energy source classification	RS1: LED indicators	P
10.2.1	General classification		P
10.3	Protection against laser radiation	No laser	N/A
	Laser radiation that exists equipment:		—
	Normal, abnormal, single-fault.....:	---	N/A
	Instructional safeguard .....	---	—
	Tool .....	---	—
10.4	Protection against visible, infrared, and UV radiation		P
10.4.1	General	LED indicators	P
10.4.1.a)	RS3 for Ordinary and instructed persons .....	---	N/A
10.4.1.b)	RS3 accessible to a skilled person .....	---	N/A
	Personal safeguard (PPE) instructional safeguard .....	---	—
10.4.1.c)	Equipment visible, IR, UV does not exceed RS1 :		N/A
10.4.1.d)	Normal, abnormal, single-fault conditions .....	(See appended table B.3 & B.4)	N/A
10.4.1.e)	Enclosure material employed as safeguard is opaque .....	---	N/A
10.4.1.f)	UV attenuation .....	---	N/A
10.4.1.g)	Materials resistant to degradation UV .....	---	N/A
10.4.1.h)	Enclosure containment of optical radiation.....:	---	N/A
10.4.1.i)	Exempt Group under normal operating conditions :	---	N/A
10.4.2	Instructional safeguard .....	---	N/A
10.5	Protection against x-radiation		N/A
10.5.1	X- radiation energy source that exists equipment :	(See appended table B.3 & B.4)	N/A
	Normal, abnormal, single fault conditions		N/A
	Equipment safeguards.....:	---	N/A
	Instructional safeguard for skilled person .....	---	N/A
10.5.3	Most unfavourable supply voltage to give maximum radiation .....	---	—
	Abnormal and single-fault condition.....:	(See appended table B.3 & B.4)	N/A
	Maximum radiation (pA/kg).....:	---	N/A
10.6	Protection against acoustic energy sources	No portable device	N/A
10.6.1	General		N/A
10.6.2	Classification		N/A
	Acoustic output, dB(A) .....	---	N/A
	Output voltage, unweighted r.m.s. ....:	---	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
10.6.4	Protection of persons		N/A
	Instructional safeguards..... :	---	N/A
	Equipment safeguard prevent ordinary person to RS2 ..... :	---	—
	Means to actively inform user of increase sound pressure ..... :	---	—
	Equipment safeguard prevent ordinary person to RS2 ..... :	---	—
10.6.5	Requirements for listening devices (headphones, earphones, etc.)		N/A
10.6.5.1	Corded passive listening devices with analog input		N/A
	Input voltage with 94 dB(A) $L_{Aeq}$ acoustic pressure output ..... :	---	—
10.6.5.2	Corded listening devices with digital input		N/A
	Maximum dB(A) ..... :	---	—
10.6.5.3	Cordless listening device		N/A
	Maximum dB(A) ..... :	---	—
<b>B</b>	<b>NORMAL OPERATING CONDITION TESTS, ABNORMAL OPERATING CONDITION TESTS AND SINGLE FAULT CONDITION TESTS</b>		<b>P</b>
B.2	Normal Operating Conditions		P
B.2.1	General requirements ..... :	(See Test Item Particulars and appended test tables)	P
	Audio Amplifiers and equipment with audio amplifiers..... :	(See Annex E)	N/A
B.2.3	Supply voltage and tolerances		P
B.2.5	Input test ..... :	(See appended table B.2.5)	P
B.3	Simulated abnormal operating conditions		P
B.3.1	General requirements ..... :	(See appended table B.3)	P
B.3.2	Covering of ventilation openings		N/A
B.3.3	D.C. mains polarity test	Coded plug	N/A
B.3.4	Setting of voltage selector ..... :	No such parts	N/A
B.3.5	Maximum load at output terminals..... :	---	N/A
B.3.6	Reverse battery polarity	Not possible	N/A
B.3.7	Abnormal operating conditions as specified in Clause E.2.		N/A
B.3.8	Safeguards functional during and after abnormal operating conditions		P
B.4	Simulated single fault conditions		P
B.4.2	Temperature controlling device open or short-circuited..... :	(See appended table B.4)	N/A
B.4.3	Motor tests		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
B.4.3.1	Motor blocked or rotor locked increasing the internal ambient temperature .....	(See Clause G.5)	N/A
B.4.4	Short circuit of functional insulation		P
B.4.4.1	Short circuit of clearances for functional insulation		P
B.4.4.2	Short circuit of creepage distances for functional insulation		P
B.4.4.3	Short circuit of functional insulation on coated printed boards		N/A
B.4.5	Short circuit and interruption of electrodes in tubes and semiconductors	No such parts	N/A
B.4.6	Short circuit or disconnect of passive components		P
B.4.7	Continuous operation of components		P
B.4.8	Class 1 and Class 2 energy sources within limits during and after single fault conditions		P
B.4.9	Battery charging under single fault conditions ....	(See Annex M)	P
<b>C</b>	<b>UV RADIATION</b>		N/A
C.1	Protection of materials in equipment from UV radiation		N/A
C.1.2	Requirements		N/A
C.1.3	Test method		N/A
C.2	UV light conditioning test		N/A
C.2.1	Test apparatus		N/A
C.2.2	Mounting of test samples		N/A
C.2.3	Carbon-arc light-exposure apparatus		N/A
C.2.4	Xenon-arc light exposure apparatus		N/A
<b>D</b>	<b>TEST GENERATORS</b>		N/A
D.1	Impulse test generators		N/A
D.2	Antenna interface test generator		N/A
D.3	Electronic pulse generator		N/A
<b>E</b>	<b>TEST CONDITIONS FOR EQUIPMENT CONTAINING AUDIO AMPLIFIERS</b>		N/A
E.1	Audio amplifier normal operating conditions		N/A
	Audio signal voltage (V) .....	---	---
	Rated load impedance ( $\Omega$ ) .....	---	---
E.2	Audio amplifier abnormal operating conditions		N/A



IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>F</b>	<b>EQUIPMENT MARKINGS, INSTRUCTIONS, AND INSTRUCTIONAL SAFEGUARDS</b>		<b>P</b>
F.1	General requirements		P
	Instructions – Language .....	English	—
F.2	Letter symbols and graphical symbols		P
F.2.1	Letter symbols according to IEC60027-1		P
F.2.2	Graphic symbols IEC, ISO or manufacturer specific	See marking plate	P
F.3	Equipment markings		P
F.3.1	Equipment marking locations		P
F.3.2	Equipment identification markings		P
F.3.2.1	Manufacturer identification .....	NetModule	—
F.3.2.2	Model identification .....	NG800	—
F.3.3	Equipment rating markings		P
F.3.3.1	Equipment with direct connection to mains	No mains	N/A
F.3.3.2	Equipment without direct connection to mains	Connection to vehicle battery	P
F.3.3.3	Nature of supply voltage .....	==	—
F.3.3.4	Rated voltage .....	12 - 24 V= (+50 %/ -25 %)	—
F.3.3.4	Rated frequency .....	---	—
F.3.3.6	Rated current or rated power .....	0.9 A, 10 W	—
F.3.3.7	Equipment with multiple supply connections		N/A
F.3.4	Voltage setting device		N/A
F.3.5	Terminals and operating devices		P
F.3.5.1	Mains appliance outlet and socket-outlet markings :	---	N/A
F.3.5.2	Switch position identification marking .....	---	N/A
F.3.5.3	Replacement fuse identification and rating markings .....	External fuse (3 A) recommended (see product specification)	P
F.3.5.4	Replacement battery identification marking.....:	Not replaceable by user	N/A
F.3.5.5	Terminal marking location		P
F.3.6	Equipment markings related to equipment classification		N/A
F.3.6.1	Class I Equipment		N/A
F.3.6.1.1	Protective earthing conductor terminal		N/A
F.3.6.1.2	Neutral conductor terminal		N/A
F.3.6.1.3	Protective bonding conductor terminals		N/A
F.3.6.2	Class II equipment (IEC60417-5172)		N/A
F.3.6.2.1	Class II equipment with or without functional earth		N/A
F.3.6.2.2	Class II equipment with functional earth terminal marking		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
F.3.7	Equipment IP rating marking ..... :	---	—
F.3.8	External power supply output marking		N/A
F.3.9	Durability, legibility and permanence of marking		P
F.3.10	Test for permanence of markings		P
F.4	Instructions		P
	a) Equipment for use in locations where children not likely to be present - marking		N/A
	b) Instructions given for installation or initial use		P
	c) Equipment intended to be fastened in place		P
	d) Equipment intended for use only in restricted access area		N/A
	e) Audio equipment terminals classified as ES3 and other equipment with terminals marked in accordance F.3.6.1		N/A
	f) Protective earthing employed as safeguard	Protective earth not required, grounding the base plate is optional	N/A
	g) Protective earthing conductor current exceeding ES 2 limits		N/A
	h) Symbols used on equipment		N/A
	i) Permanently connected equipment not provided with all-pole mains switch		N/A
	j) Replaceable components or modules providing safeguard function		N/A
F.5	Instructional safeguards		N/A
	Where “instructional safeguard” is referenced in the test report it specifies the required elements, location of marking and/or instruction		N/A
<b>G</b>	<b>COMPONENTS</b>		<b>P</b>
<b>G.1</b>	<b>Switches</b>		<b>N/A</b>
G.1.1	General requirements		N/A
G.1.2	Ratings, endurance, spacing, maximum load		N/A
<b>G.2</b>	<b>Relays</b>		<b>N/A</b>
G.2.1	General requirements		N/A
G.2.2	Overload test		N/A
G.2.3	Relay controlling connectors supply power		N/A
G.2.4	Mains relay, modified as stated in G.2		N/A
<b>G.3</b>	<b>Protection Devices</b>		<b>P</b>
G.3.1	Thermal cut-offs		N/A
G.3.1.1a) &b)	Thermal cut-outs separately approved according to IEC 60730 with conditions indicated in a) & b)		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.3.1.1c)	Thermal cut-outs tested as part of the equipment as indicated in c)		N/A
G.3.1.2	Thermal cut-off connections maintained and secure		N/A
G.3.2	Thermal links		N/A
G.3.2.1a)	Thermal links separately tested with IEC 60691		N/A
G.3.2.1b)	Thermal links tested as part of the equipment		N/A
	Aging hours (H)..... :	---	—
	Single Fault Condition..... :	---	—
	Test Voltage (V) and Insulation Resistance ( $\Omega$ ) . :	---	—
G.3.3	PTC Thermistors		N/A
G.3.4	Overcurrent protection devices		P
G.3.5	Safeguards components not mentioned in G.3.1 to G.3.5		N/A
G.3.5.1	Non-resettable devices suitably rated and marking provided	External fuse (3 A) recommended (see product specification)	P
G.3.5.2	Single faults conditions ..... :	(See appended Table B.4)	P
<b>G.4</b>	<b>Connectors</b>		P
G.4.1	Spacings		P
G.4.2	Mains connector configuration ..... :	No AC mains	N/A
G.4.3	Plug is shaped that insertion into mains socket-outlets or appliance coupler is unlikely		N/A
<b>G.5</b>	<b>Wound Components</b>		N/A
G.5.1	Wire insulation in wound components .....	(See Annex J)	N/A
G.5.1.2 a)	Two wires in contact inside wound component, angle between 45° and 90°		N/A
G.5.1.2 b)	Construction subject to routine testing		N/A
G.5.2	Endurance test on wound components		N/A
G.5.2.1	General test requirements		N/A
G.5.2.2	Heat run test		N/A
	Time (s)..... :	---	—
	Temperature (°C)..... :	---	—
G.5.2.3	Wound Components supplied by mains		N/A
<b>G.5.3</b>	<b>Transformers</b>		N/A
G.5.3.1	Requirements applied (IEC61204-7, IEC61558-1/-2, and/or IEC62368-1) ..... :	Data transformers only (Ethernet interface)	N/A
	Position ..... :	---	—
	Method of protection ..... :	---	—
G.5.3.2	Insulation		N/A
	Protection from displacement of windings ..... :	---	—
G.5.3.3	Overload test..... :	(See appended table B.3)	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.5.3.3.1	Test conditions		N/A
G.5.3.3.2	Winding Temperatures testing in the unit		N/A
G.5.3.3.3	Winding Temperatures - Alternative test method		N/A
<b>G.5.4</b>	<b>Motors</b>		N/A
G.5.4.1	General requirements		N/A
	Position .....	---	—
G.5.4.2	Test conditions		N/A
G.5.4.3	Running overload test		N/A
G.5.4.4	Locked-rotor overload test		N/A
	Test duration (days) .....	---	—
G.5.4.5	Running overload test for d.c. motors in secondary circuits		N/A
G.5.4.5.2	Tested in the unit		N/A
	Electric strength test (V) .....	---	—
G.5.4.5.3	Tested on the Bench - Alternative test method; test time (h) .....	---	N/A
	Electric strength test (V) .....	---	—
G.5.4.6	Locked-rotor overload test for d.c. motors in secondary circuits		N/A
G.5.4.6.2	Tested in the unit		N/A
	Maximum Temperature .....	---	N/A
	Electric strength test (V) .....	---	N/A
G.5.4.6.3	Tested on the bench - Alternative test method; test time (h).....	---	N/A
	Electric strength test (V) .....	---	N/A
G.5.4.7	Motors with capacitors		N/A
G.5.4.8	Three-phase motors		N/A
G.5.4.9	Series motors		N/A
	Operating voltage .....	---	—
<b>G.6</b>	<b>Wire Insulation</b>		P
G.6.1	General		P
G.6.2	Solvent-based enamel wiring insulation		N/A
<b>G.7</b>	<b>Mains supply cords</b>		N/A
G.7.1	General requirements		N/A
	Type .....	---	—
	Rated current (A) .....	---	—
	Cross-sectional area (mm <sup>2</sup> ), (AWG) .....	---	—
G.7.2	Compliance and test method		N/A
G.7.3	Cord anchorages and strain relief for non-detachable power supply cords		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.7.3.2	Cord strain relief		N/A
G.7.3.2.1	Requirements		N/A
	Strain relief test force (N)..... :	---	—
G.7.3.2.2	Strain relief mechanism failure		N/A
G.7.3.2.3	Cord sheath or jacket position, distance (mm) ... :	---	—
G.7.3.2.4	Strain relief comprised of polymeric material		N/A
G.7.4	Cord Entry..... :	(See appended table 5.4.11.1)	N/A
G.7.5	Non-detachable cord bend protection		N/A
G.7.5.1	Requirements		N/A
G.7.5.2	Mass (g) .....	---	—
	Diameter (mm)..... :	---	—
	Temperature (°C)..... :	---	—
G.7.6	Supply wiring space		N/A
G.7.6.2	Stranded wire		N/A
G.7.6.2.1	Test with 8 mm strand		N/A
<b>G.8</b>	<b>Varistors</b>		N/A
G.8.1	General requirements		N/A
G.8.2	Safeguard against shock		N/A
G.8.3	Safeguard against fire		N/A
G.8.3.2	Varistor overload test..... :	(See appended table B.3)	N/A
G.8.3.3	Temporary overvoltage..... :	(See appended table B.3)	N/A
<b>G.9</b>	<b>Integrated Circuit (IC) Current Limiters</b>		N/A
G.9.1 a)	Manufacturer defines limit at max. 5A.		N/A
G.9.1 b)	Limiters do not have manual operator or reset		N/A
G.9.1 c)	Supply source does not exceed 250 VA .....	---	—
G.9.1 d)	IC limiter output current (max. 5A)..... :	---	—
G.9.1 e)	Manufacturers' defined drift .....	---	—
G.9.2	Test Program 1		N/A
G.9.3	Test Program 2		N/A
G.9.4	Test Program 3		N/A
<b>G.10</b>	<b>Resistors</b>		N/A
G.10.1	General requirements		N/A
G.10.2	Resistor test		N/A
G.10.3	Test for resistors serving as safeguards between the mains and an external circuit consisting of a coaxial cable		N/A
G.10.3.1	General requirements		N/A
G.10.3.2	Voltage surge test		N/A
G.10.3.3	Impulse test		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>G.11</b>	<b>Capacitor and RC units</b>		N/A
G.11.1	General requirements		N/A
G.11.2	Conditioning of capacitors and RC units		N/A
G.11.3	Rules for selecting capacitors		N/A
<b>G.12</b>	<b>Optocouplers</b>		N/A
	Optocouplers comply with IEC 60747-5-5:2007 Spacing or Electric Strength Test (specify option and test results) .....	---	N/A
	Type test voltage Vini .....	---	—
	Routine test voltage, Vini,b .....	---	—
<b>G.13</b>	<b>Printed boards</b>		P
G.13.1	General requirements		P
G.13.2	Uncoated printed boards		P
G.13.3	Coated printed boards		N/A
G.13.4	Insulation between conductors on the same inner surface		P
	Compliance with cemented joint requirements (Specify construction) .....	---	—
G.13.5	Insulation between conductors on different surfaces		N/A
	Distance through insulation .....	(See appended table 5.4.4.5)	N/A
	Number of insulation layers (pcs) .....	---	—
G.13.6	Tests on coated printed boards		N/A
G.13.6.1	Sample preparation and preliminary inspection		N/A
G.13.6.2a)	Thermal conditioning		N/A
G.13.6.2b)	Electric strength test		N/A
G.13.6.2c)	Abrasion resistance test		N/A
<b>G.14</b>	<b>Coating on components terminals</b>		N/A
G.14.1	Requirements .....	(See G.13)	N/A
<b>G.15</b>	<b>Liquid filled components</b>		N/A
G.15.1	General requirements		N/A
G.15.2	Requirements		N/A
G.15.3	Compliance and test methods		N/A
G.15.3.1	Hydrostatic pressure test		N/A
G.15.3.2	Creep resistance test		N/A
G.15.3.3	Tubing and fittings compatibility test		N/A
G.15.3.4	Vibration test		N/A
G.15.3.5	Thermal cycling test		N/A
G.15.3.6	Force test		N/A
G.15.4	Compliance		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>G.16</b>	<b>IC including capacitor discharge function (ICX)</b>		N/A
a)	Humidity treatment in accordance with sc5.4.8 – 120 hours		N/A
b)	Impulse test using circuit 2 with $U_c$ = to transient voltage .....	---	N/A
C1)	Application of ac voltage at 110% of rated voltage for 2.5 minutes		N/A
C2)	Test voltage .....	---	—
D1)	10,000 cycles on and off using capacitor with smallest capacitance resistor with largest resistance specified by manufacturer		N/A
D2)	Capacitance .....	---	—
D3)	Resistance .....	---	—
<b>H</b>	<b>CRITERIA FOR TELEPHONE RINGING SIGNALS</b>		N/A
H.1	General		N/A
H.2	Method A		N/A
H.3	Method B		N/A
H.3.1	Ringing signal		N/A
H.3.1.1	Frequency (Hz) .....	---	—
H.3.1.2	Voltage (V) .....	---	—
H.3.1.3	Cadence; time (s) and voltage (V) .....	---	—
H.3.1.4	Single fault current (mA): .....	---	—
H.3.2	Tripping device and monitoring voltage .....	---	N/A
H.3.2.1	Conditions for use of a tripping device or a monitoring voltage complied with		N/A
H.3.2.2	Tripping device		N/A
H.3.2.3	Monitoring voltage (V).....	---	—
<b>J</b>	<b>INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION</b>		N/A
	General requirements	(See separate test report)	N/A
<b>K</b>	<b>SAFETY INTERLOCKS</b>		N/A
K.1	General requirements		N/A
K.2	Components of safety interlock safeguard mechanism .....	(See Annex G)	N/A
K.3	Inadvertent change of operating mode		N/A
K.4	Interlock safeguard override		N/A
K.5	Fail-safe		N/A
	Compliance .....	(See appended table B.4)	N/A
K.6	Mechanically operated safety interlocks		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
K.6.1	Endurance requirement		N/A
K.6.2	Compliance and Test method..... :	---	N/A
K.7	Interlock circuit isolation		N/A
K.7.1	Separation distance for contact gaps & interlock circuit elements (type and circuit location) ..... :	---	N/A
K.7.2	Overload test, Current (A)..... :	---	N/A
K.7.3	Endurance test		N/A
K.7.4	Electric strength test ..... :	(See appended table 5.4.11)	N/A
<b>L</b>	<b>DISCONNECT DEVICES</b>		P
L.1	General requirements	Plug	P
L.2	Permanently connected equipment		N/A
L.3	Parts that remain energized		N/A
L.4	Single phase equipment		N/A
L.5	Three-phase equipment		N/A
L.6	Switches as disconnect devices		N/A
L.7	Plugs as disconnect devices		P
L.8	Multiple power sources		N/A
<b>M</b>	<b>EQUIPMENT CONTAINING BATTERIES AND THEIR PROTECTION CIRCUITS</b>		P
M.1	General requirements		P
M.2	Safety of batteries and their cells		P
M.2.1	Requirements		P
M.2.2	Compliance and test method (identify method).. :	Coin cell, UL approved (File No: MH14002)	P
M.3	Protection circuits		P
M.3.1	Requirements		P
M.3.2	Tests		P
	- Overcharging of a rechargeable battery	Non-rechargeable	N/A
	- Unintentional charging of a non-rechargeable battery		P
	- Reverse charging of a rechargeable battery	Non-rechargeable	N/A
	- Excessive discharging rate for any battery		P
M.3.3	Compliance ..... :	(See appended Tables and Annex M and M.4)	N/A
M.4	Additional safeguards for equipment containing secondary lithium battery		N/A
M.4.1	General		N/A
M.4.2	Charging safeguards		N/A
M.4.2.1	Charging operating limits		N/A



IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
M.4.2.2a)	Charging voltage, current and temperature .....	(See Table M.4)	—
M.4.2.2 b)	Single faults in charging circuitry .....	(See Annex B.4)	—
M.4.3	Fire Enclosure		N/A
M.4.4	Endurance of equipment containing a secondary lithium battery		N/A
M.4.4.2	Preparation		N/A
M.4.4.3	Drop and charge/discharge function tests		N/A
	Drop		N/A
	Charge		N/A
	Discharge		N/A
M.4.4.4	Charge-discharge cycle test		N/A
M.4.4.5	Result of charge-discharge cycle test		N/A
M.5	Risk of burn due to short circuit during carrying	Coin cell, PS1 circuit	N/A
M.5.1	Requirement		N/A
M.5.2	Compliance and Test Method (Test of P.2.3)		N/A
M.6	Prevention of short circuits and protection from other effects of electric current		N/A
M.6.1	Short circuits	Coin cell, PS1 circuit	N/A
M.6.1.1	General requirements		N/A
M.6.1.2	Test method to simulate an internal fault		N/A
M.6.1.3	Compliance (Specify M.6.1.2 or alternative method) .....	---	N/A
M.6.2	Leakage current (mA) .....	---	N/A
M.7	Risk of explosion from lead acid and NiCd batteries		N/A
M.7.1	Ventilation preventing explosive gas concentration		N/A
M.7.2	Compliance and test method		N/A
M.8	Protection against internal ignition from external spark sources of lead acid batteries		N/A
M.8.1	General requirements		N/A
M.8.2	Test method		N/A
M.8.2.1	General requirements		N/A
M.8.2.2	Estimation of hypothetical volume $V_z$ (m <sup>3</sup> /s) .....	---	—
M.8.2.3	Correction factors.....	---	—
M.8.2.4	Calculation of distance $d$ (mm) .....	---	—
M.9	Preventing electrolyte spillage		P
M.9.1	Protection from electrolyte spillage		P
M.9.2	Tray for preventing electrolyte spillage	Enclosure of equipment	P
M.10	Instructions to prevent reasonably foreseeable misuse (Determination of compliance: inspection, data review; or abnormal testing) .....	---	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>N</b>	<b>ELECTROCHEMICAL POTENTIALS</b>		N/A
	Metal(s) used .....	---	—
<b>O</b>	<b>MEASUREMENT OF CREEPAGE DISTANCES AND CLEARANCES</b>		P
	Figures O.1 to O.20 of this Annex applied.....	---	—
<b>P</b>	<b>SAFEGUARDS AGAINST ENTRY OF FOREIGN OBJECTS AND SPILLAGE OF INTERNAL LIQUIDS</b>		P
P.1	General requirements		P
P.2.2	Safeguards against entry of foreign object		P
	Location and Dimensions (mm) .....	No openings	—
P.2.3	Safeguard against the consequences of entry of foreign object		N/A
P.2.3.1	Safeguards against the entry of a foreign object		N/A
	Openings in transportable equipment		N/A
	Transportable equipment with metalized plastic parts .....	---	N/A
P.2.3.2	Openings in transportable equipment in relation to metallized parts of a barrier or enclosure (identification of supplementary safeguard) .....	---	N/A
P.3	Safeguards against spillage of internal liquids	No internal liquids	N/A
P.3.1	General requirements		N/A
P.3.2	Determination of spillage consequences		N/A
P.3.3	Spillage safeguards		N/A
P.3.4	Safeguards effectiveness		N/A
P.4	Metallized coatings and adhesive securing parts		N/A
P.4.2 a)	Conditioning testing		N/A
	Tc (°C).....	---	—
	Tr (°C) .....	---	—
	Ta (°C) .....	---	—
P.4.2 b)	Abrasion testing .....	(See G.13.6.2)	N/A
P.4.2 c)	Mechanical strength testing .....	(See Annex T)	N/A
<b>Q</b>	<b>CIRCUITS INTENDED FOR INTERCONNECTION WITH BUILDING WIRING</b>		N/A
Q.1	Limited power sources		N/A
Q.1.1 a)	Inherently limited output		N/A
Q.1.1 b)	Impedance limited output		N/A
	- Regulating network limited output under normal operating and simulated single fault condition		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
Q.1.1 c)	Overcurrent protective device limited output		N/A
Q.1.1 d)	IC current limiter complying with G.9		N/A
Q.1.2	Compliance and test method		N/A
Q.2	Test for external circuits – paired conductor cable		N/A
	Maximum output current (A) ..... :	---	—
	Current limiting method..... :	---	—
<b>R</b>	<b>LIMITED SHORT CIRCUIT TEST</b>		N/A
R.1	General requirements		N/A
R.2	Determination of the overcurrent protective device and circuit		N/A
R.3	Test method Supply voltage (V) and short-circuit current (A)). ..... :	---	N/A
<b>S</b>	<b>TESTS FOR RESISTANCE TO HEAT AND FIRE</b>		N/A
S.1	Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W	Bottom: metal, Cover: certified UL 94 V-0 material	N/A
	Samples, material ..... :	---	—
	Wall thickness (mm) ..... :	---	—
	Conditioning (°C) ..... :	---	—
	Test flame according to IEC 60695-11-5 with conditions as set out		N/A
	- Material not consumed completely		N/A
	- Material extinguishes within 30s		N/A
	- No burning of layer or wrapping tissue		N/A
S.2	Flammability test for fire enclosure and fire barrier integrity		N/A
	Samples, material ..... :	---	—
	Wall thickness (mm) ..... :	---	—
	Conditioning (°C) ..... :	---	—
	Test flame according to IEC 60695-11-5 with conditions as set out		N/A
	Test specimen does not show any additional hole		N/A
S.3	Flammability test for the bottom of a fire enclosure		N/A
	Samples, material ..... :	---	—
	Wall thickness (mm) ..... :	---	—
	Cheesecloth did not ignite		N/A
S.4	Flammability classification of materials		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
S.5	Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W		N/A
	Samples, material .....	---	—
	Wall thickness (mm) .....	---	—
	Conditioning (test condition), (°C).....	---	—
	Test flame according to IEC 60695-11-20 with conditions as set out		N/A
	After every test specimen was not consumed completely		N/A
	After fifth flame application, flame extinguished within 1 min		N/A
<b>T</b>	<b>MECHANICAL STRENGTH TESTS</b>		<b>P</b>
T.1	General requirements		P
T.2	Steady force test, 10 N .....	(See appended table T.2)	P
T.3	Steady force test, 30 N .....	(See appended table T3)	P
T.4	Steady force test, 100 N .....	(See appended table T4)	N/A
T.5	Steady force test, 250 N .....	(See appended table T5)	P
T.6	Enclosure impact test	(See appended table T6)	P
	Fall test		P
	Swing test		N/A
T.7	Drop test .....	Fixed device (See appended table T7)	N/A
T.8	Stress relief test .....	(See appended table T8)	P
T.9	Impact Test (glass)		N/A
T.9.1	General requirements		N/A
T.9.2	Impact test and compliance		N/A
	Impact energy (J).....	---	—
	Height (m) .....	---	—
T.10	Glass fragmentation test.....	(See sub-clause 4.4.4.9)	N/A
T.11	Test for telescoping or rod antennas		N/A
	Torque value (Nm) .....	---	—
<b>U</b>	<b>MECHANICAL STRENGTH OF CATHODE RAY TUBES (CRT) AND PROTECTION AGAINST THE EFFECTS OF IMPLOSION</b>		<b>N/A</b>
U.1	General requirements		N/A
U.2	Compliance and test method for non-intrinsically protected CRTs		N/A
U.3	Protective Screen .....	(See Annex T)	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>V</b>	<b>DETERMINATION OF ACCESSIBLE PARTS (FINGERS, PROBES AND WEDGES)</b>		P
V.1	Accessible parts of equipment	Enclosure & interface connectors	P
V.2	Accessible part criterion		P

4.1.2	TABLE: List of critical components					P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity <sup>1</sup>	
- Description <sup>2)</sup> :	TCU Mainboard					
PCB TCU Mainboard Rev. 2.1	Wuerth Elektronik GmbH & Co	50	FR-4 UL 94 V-0 1.6 mm 130 °C	UL 796 CSA C22.2 No. 0.17	cURus E76251	
	Interchangeable	---	FR-4 UL 94 V-0 1.6 mm 130 °C	UL 796	---	
Connector X4201	Molex	500762-0481	6 A 48-pol. 105 °C	IP6K7	CE Manufact. declaration	
Battery	Renata SA	CR1632	Lithium 3 V, 137 mAh	UL 1642	UR MH14002	
Ethernet Transformer T2100	Huizhou Link-PP Electronics Limited Company	LP1188NLE	10/100Base-T 1'500 VAC 105 °C	UL 60950-1	UR E484635	
Capacitor C2105	AVX	1210GC102M AT1A	1 nF 2'000 V	IEC/EN 62368-1	Tested in appliance	
- Description <sup>2)</sup> :	TCU UserModule_Pro					
PCB TCU UserModule Rev. 2.1	Wuerth Elektronik GmbH & Co	50	FR-4 UL 94 V-0 1.6 mm 130 °C	UL 796 CSA C22.2 No. 0.17	cURus E76251	
	Interchangeable	---	FR-4 UL 94 V-0 1.6 mm 130 °C	UL 796	---	
Power switch U900	Infineon	BTT6200- 4EMA	36 VDC 4 channels 250 mA each, 1 A total	IEC/EN 62368-1	Tested in appliance	
- Description <sup>2)</sup> :	Other components					
WWAN module	ublox	TOBY-L2 series	compliant with communication standards	LTE, UMTS, GSM, GPRS, EDGE	CE FCC	
WLAN module	Texas Instruments	WL18MODGI	compliant with communication standards	EN 60950-1 WiFi 802.11abgn	CE FCC	
Enclosure (revision with ASA/PC enclosure material never went into series production)	Romira GmbH	ROMILOY 8170	ASA/PC min. 2.5	UL 746 CSA-C22.2 No. 0.17	cURus E148878	

4.1.2	TABLE: List of critical components					P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity <sup>1</sup>	
Enclosure (from revision A01 onwards)	Sabic Innovative Plastics US L L C	LEXAN 500R resin	PC min. 2.5	UL 746 CSA-C22.2 No. 0.17	cURus E121562	
External fuse	Littelfuse Inc	ATOF Blade Fuse 0287003.PXC N	32 V 3 A	UL 275A CSA C22.2 No. 106	UR AU1410 CSA LR29862	
Supplementary information: <sup>1</sup> ) Provided evidence ensures the agreed level of compliance. See OD-CB2039. <sup>2</sup> ) Description line content is optional. Main line description needs to clearly detail the component used for testing						

4.8.4, 4.8.5	TABLE: Lithium coin/button cell batteries mechanical tests			N/A
(The following mechanical tests are conducted in the sequence noted.)				
4.8.4.2	TABLE: Stress Relief test			—
Part		Material	Oven Temperature (°C)	Comments
4.8.4.3	TABLE: Battery replacement test			—
Battery part no. ....:				—
Battery Installation/withdrawal			Battery Installation/Removal Cycle	Comments
			1	
			2	
			3	
			4	
			5	
			6	
			8	
			9	
			10	
4.8.4.4	TABLE: Drop test			—
Impact Area		Drop Distance	Drop No.	Observations
			1	
			2	
			3	
4.8.4.5	TABLE: Impact			—
Impacts per surface		Surface tested	Impact energy (Nm)	Comments

4.8.4, 4.8.5	TABLE: Lithium coin/button cell batteries mechanical tests			N/A
(The following mechanical tests are conducted in the sequence noted.)				
4.8.4.6	TABLE: Crush test			—
Test position		Surface tested	Crushing Force (N)	Duration force applied (s)
Supplementary information:				

4.8.5	<b>TABLE: Lithium coin/button cell batteries mechanical test result</b>			N/A
<b>Test position</b>		<b>Surface tested</b>	<b>Force (N)</b>	<b>Duration force applied (s)</b>
Supplementary information:				

5.2	Table: Classification of electrical energy sources						P
5.2.2.2 – Steady State Voltage and Current conditions							
No.	Supply Voltage	Location  (e.g. circuit designation)	Test conditions	Parameters			ES Class
				U (Vrms or Vpk)	I (A <sub>pk</sub> or A <sub>rms</sub> )	Hz	
1	24 VDC	All circuits	Normal	24 VDC	---	---	ES1
			Abnormal	36 VDC	---	---	
			Single fault – OC/SC	36 VDC / 0 VDC	---	---	



5.2.2.3 - Capacitance Limits							
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters		ES Class	
				Capacitance, nF	Upk (V)		
---	---	---	Normal	---	---	---	
			Abnormal	---	---		
			Single fault – SC/OC	---	---		
5.2.2.4 - Single Pulses							
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters			ES Class
				Duration (ms)	Upk (V)	Ipk (mA)	
---	---	---	Normal	---	---	---	---
			Abnormal	---	---	---	
			Single fault – SC/OC	---	---	---	
5.2.2.5 - Repetitive Pulses							
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters			ES Class
				Off time (ms)	Upk (V)	Ipk (mA)	
---	---	---	Normal	---	---	---	---
			Abnormal	---	---	---	
			Single fault – SC/OC	---	---	---	
Test Conditions: Normal – Abnormal - Supplementary information: SC=Short Circuit, OC=Open Circuit							

5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Temperature measurements						P
	Supply voltage (V) ..... :	36 VDC	9 VDC	36 VDC	---	---	
	Ambient T <sub>min</sub> (°C) ..... :	23.7	23.6	---	---	---	
	Ambient T <sub>max</sub> (°C) ..... :	23.9	23.9	---	---	---	
	T <sub>ma</sub> (°C) ..... :	---	---	85 <sup>1)</sup>	---	---	
Maximum measured temperature T of part/at:		T (°C)				Allowed T <sub>max</sub> (°C)	
Surface temperatures:							
Cover (plastic, above T2100)		34.3	32.2	---	---	77	
Base plate (metallic)		35.9	32.7	---	---	60	
Power connector		30.3	28.4	---	---	60	
Antenna connectors		28.9	28.0	---	---	60	
Component temperatures:							
Ethernet transformer T2100		41.0	38.7	92.1 <sup>1)</sup>	---	105	
Ethernet PHY U2201		55.1	49.5	106.2 <sup>1)</sup>	---	125	
PCB		54.7	49.2	105.8 <sup>1)</sup>	---	130	
---		---	---	---	---	---	
Supplementary information:							
1) Calculated temperatures for T <sub>ma</sub> = 85 °C							
Note: This test covers only safety aspects; functional failures due to the temperatures are not considered							
Temperature T of winding:	t <sub>1</sub> (°C)	R <sub>1</sub> (Ω)	t <sub>2</sub> (°C)	R <sub>2</sub> (Ω)	T (°C)	Allowed T <sub>max</sub> (°C)	Insulation class
---	---	---	---	---	---	---	---
Supplementary information:							
Note 1: T <sub>ma</sub> should be considered as directed by applicable requirement							
Note 2: T <sub>ma</sub> is not included in assessment of Touch Temperatures (Clause 9)							

5.4.1.10.2	TABLE: Vicat softening temperature of thermoplastics		N/A
Penetration (mm) .....			—
Object/ Part No./Material		Manufacturer/t rademark	T softening (°C)
supplementary information:			

5.4.1.10.3	TABLE: Ball pressure test of thermoplastics			N/A
Allowed impression diameter (mm) .....		≤ 2 mm		—
Object/Part No./Material	Manufacturer/trademark	Test temperature (°C)	Impression diameter (mm)	
Supplementary information:				

<b>5.4.2.2, 5.4.2.4 and 5.4.3</b>	<b>TABLE: Minimum Clearances/Creepage distance</b>							P
Clearance (cl) and creepage distance (cr) at/of/between:	Up (V)	U r.m.s. (V)	Frequency (kHz) <sup>1</sup>	Required cl (mm)	cl (mm) <sup>2</sup>	Required <sup>3</sup> cr (mm)	cr (mm)	
Supplementary information:								
Note 1: Only for frequency above 30 kHz								
Note 2: See table 5.4.2.4 if this is based on electric strength test								
Note 3: Provide Material Group								

5.4.2.3	TABLE: Minimum Clearances distances using required withstand voltage			P
	Overvoltage Category (OV):			other
	Pollution Degree:			2
Clearance distanced between:		Required withstand voltage	Required cl (mm)	Measured cl (mm)
Ethernet signals to all other circuits		1'500 Vp	0.65 <sup>1)</sup>	0.7
Supplementary information:				
<sup>1)</sup> For operating up to 4'000 m sea level (multiplication factor = 1.29, see 5.4.2.5)				
0.5 mm * 1.29 = 0.645 mm => 0.65 mm clearance				

5.4.2.4	TABLE: Clearances based on electric strength test			N/A
Test voltage applied between:		Required cl (mm)	Test voltage (kV) peak/ r.m.s. / d.c.	Breakdown Yes / No
Supplementary information:				

<b>5.4.4.2, 5.4.4.5 c) 5.4.4.9</b>	<b>TABLE: Distance through insulation measurements</b>					N/A
Distance through insulation di at/of:	Peak voltage (V)	Frequency (kHz)	Material	Required DTI (mm)	DTI (mm)	
Supplementary information:						

<b>5.4.9</b>	<b>TABLE: Electric strength tests</b>				P
Test voltage applied between:	Voltage shape (AC, DC)	Test voltage (V)	Breakdown Yes / No		
Functional:					
---	---	---	---		
Basic/supplementary:					
Ethernet signals to all other circuits	DC	1'650 <sup>1)</sup>	No		
Reinforced:					
---	---	---	---		
Routine Tests:					
---	---	---	---		
Supplementary information: <sup>1)</sup> For operating up to 4'000 m sea level (< 1 mm; multiplication factor = 1.10, see 5.4.2.5) 1'500 V * 1.10 = 1'650 V					

<b>5.5.2.2</b>	<b>TABLE: Stored discharge on capacitors</b>					N/A
Supply Voltage (V), Hz	Test Location	Operating Condition (N, S)	Switch position On or off	Measured Voltage (after 2 seconds)	ES Classification	
Supplementary information: X-capacitors installed for testing are: <input type="checkbox"/> bleeding resistor rating: <input type="checkbox"/> ICX: Notes: A. Test Location: Phase to Neutral; Phase to Phase; Phase to Earth; and/or Neutral to Earth B. Operating condition abbreviations: N – Normal operating condition (e.g., normal operation, or open fuse); S – Single fault condition						

<b>5.6.6.2</b>	<b>TABLE: Resistance of protective conductors and terminations</b>				N/A
Accessible part	Test current (A)	Duration (min)	Voltage drop (V)	Resistance ( $\Omega$ )	
Supplementary information:					

5.7.2.2, 5.7.4	TABLE: Earthed accessible conductive part		N/A
Supply voltage ..... :			—
Location	Test conditions specified in 6.1 of IEC 60990 or Fault Condition No in IEC 60990 clause 6.2.2.1 through 6.2.2.8, except for 6.2.2.7	Touch current (mA)	
	1		
	2*		
	3		
	4		
	5		
	6		
	8		
Supplementary Information:			
Notes: [1] Supply voltage is the anticipated maximum Touch Voltage [2] Earthed neutral conductor [Voltage differences less than 1% or more] [3] Specify method used for measurement as described in IEC 60990 sub-clause 4.3 [4] IEC60990, sub-clause 6.2.2.7, Fault 7 not applicable. [5] (*) IEC60990, sub-clause 6.2.2.2 is not applicable if switch or disconnect device (e.g., appliance coupler) provided.			

6.2.2	Table: Electrical power sources (PS) measurements for classification					P
Source	Description	Measurement	Max Power after 3 s	Max Power after 5 s <sup>*)</sup>	PS Classification	
A	Power input circuits	Power (W) :	135	135	PS3	
		V <sub>A</sub> (V) :	36	36		
		I <sub>A</sub> (A) :	3.75 <sup>1)</sup>	3.75 <sup>1)</sup>		
B	All circuits after voltage regulator U5000	Power (W) :	24.6	24.6	PS2	
		V <sub>A</sub> (V) :	3.9	3.9		
		I <sub>A</sub> (A) :	6.3	6.3		
C	Digital outputs	Power (W) :	36.0	36.0	PS2	
		V <sub>A</sub> (V) :	36	36		
		I <sub>A</sub> (A) :	1.0	1.0		
Supplementary Information: (*) Measurement taken only when limits at 3 seconds exceed PS1 limits  <sup>1)</sup> External fuse (3 A) recommended (see product specification)						

6.2.3.1	Table: Determination of Potential Ignition Sources (Arcing PIS)				N/A
Location	Open circuit voltage After 3 s (V <sub>p</sub> )	Measured r.m.s current (I <sub>rms</sub> )	Calculated value (V <sub>p</sub> x I <sub>rms</sub> )	Arcing PIS? Yes / No	
Supplementary information:  An Arcing PIS requires a minimum of 50 V (peak) a.c. or d.c. An Arcing PIS is established when the product of the open circuit voltage (V <sub>p</sub> ) and normal operating condition rms current (I <sub>rms</sub> ) is greater than 15.					

6.2.3.2	Table: Determination of Potential Ignition Sources (Resistive PIS)					P
Circuit Location (x-y)	Operating Condition (Normal / Describe Single Fault)	Measured wattage or VA During first 30 s (W / VA)	Measured wattage or VA After 30 s (W / VA)	Protective Circuit, Regulator, or PTC Operated? Yes / No (Comment)	Resistive PIS? Yes/No	
Power input circuits	Normal	5.04	5.04	No	No	
Power input circuits	Before fuse melts	135 <sup>1)</sup>	135 <sup>1)</sup>	No	Yes	
Supplementary Information:						
A combination of voltmeter, VA and ammeter IA may be used instead of a wattmeter. If a separate voltmeter and ammeter are used, the product of (VA x IA) is used to determine Resistive PIS classification. A Resistive PIS: (a) dissipates more than 15 W, measured after 30 s of normal operation, <u>or</u> (b) under single fault conditions has either a power exceeding 100 W measured immediately after the introduction of the fault if electronic circuits, regulators or PTC devices are used, or has an available power exceeding 15 W measured 30 s after introduction of the fault.						
<sup>1)</sup> External fuse (3 A) recommended (see product specification)						

8.5.5	TABLE: High Pressure Lamp		N/A
Description		Values	Energy Source Classification
Lamp type..... :			—
Manufacturer ..... :			—
Cat no. .... :			—
Pressure (cold) (MPa)..... :			MS_
Pressure (operating) (MPa) ..... :			MS_
Operating time (minutes) ..... :			—
Explosion method..... :			—
Max particle length escaping enclosure (mm) :			MS_
Max particle length beyond 1 m (mm)..... :			MS_
Overall result ..... :			
Supplementary information:			

B.2.5		TABLE: Input test						P
U (V)	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status	
9	0.433	0.9	3.90	10	1)	3	Data transfer via wireless modules	
12	0.333	0.9	4.00	10	1)	3	Data transfer via wireless modules	
24	0.185	0.9	4.44	10	1)	3	Data transfer via wireless modules	
36	0.140	0.9	5.04	10	1)	3	Data transfer via wireless modules	
Supplementary information: Equipment may be have rated current or rated power or both. Both should be measured								
1) External fuse (3 A) recommended (see product specification)								

B.3		TABLE: Abnormal operating condition tests						P
Ambient temperature (°C) .....					24			—
Power source for EUT: Manufacturer, model/type, output rating ...					See below			—
Component No.	Abnormal Condition	Supply voltage, (V)	Test time (min)	Fuse no.	Fuse current, (A)	T-couple	Temp. (°C)	Observation
Digital outputs X4201	overload	36	30	---	---	---	---	Short circuit and thermal protected power switch U900, no hazard
Supplementary information: Test table is provided to record abnormal and fault conditions for all applicable energy sources including Thermal burn injury. Column "Abnormal/Fault." Specify if test condition by indicating "Abnormal" then the condition for a Clause B.3 test or "Single Fault" then the condition for Clause B.4.								



B.4		TABLE: Fault condition tests							P
Ambient temperature (°C) .....					24			—	
Power source for EUT: Manufacturer, model/type, output rating ...					See below			—	
Component No.	Fault Condition	Supply voltage, (V)	Test time (min)	Fuse no.	Fuse current, (A)	T-couple	Temp. (°C)	Observation	
C4209, C4216, C4217, C5028, C5000 - C5003	short circuit after fuse <sup>1)</sup>	36	---	<sup>1)</sup>	3 A	--	--	Fuse opened, no hazard	
C5007 - C5010 C5019 - C5022 C5014, C5015, C5017, C5029	short circuit (+5V0)	36	---	---	---	--	--	Short circuit and thermal protected voltage regulator U5000, no hazard	
C3104, C3105, C3107 - C3109 C3119	short circuit (+4V0)	36	---	---	---	--	--	Short circuit (hiccup mode) and thermal protected voltage regulator U3100, no hazard	
C4003 - C4005	short circuit (+3V3)	36	---	---	---	--	--	Short circuit (hiccup mode) and thermal protected voltage regulator U4000, no hazard	
Supplementary information: If no test time is declared test has not been carried out because considering the situation. All components within metallic enclosure without openings.  <sup>1)</sup> External fuse (3 A) recommended (see product specification)									

Annex M	TABLE: Batteries								P	
The tests of Annex M are applicable only when appropriate battery data is not available								N/A		
Is it possible to install the battery in a reverse polarity position? .....							No		N/A	
	Non-rechargeable batteries			Rechargeable batteries						
	Discharging		Un-intentional charging	Charging		Discharging		Reversed charging		
	Meas. current	Manuf. Specs.		Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.	
Max. current during normal condition	< 0.001 A	0.2 A	Not possible	---	---	---	---	---	---	
Max. current during fault condition	0.2 A	1.5 A	Not possible	---	---	---	---	---	---	
Test results:								Verdict		
- Chemical leaks						No		P		
- Explosion of the battery						No		P		
- Emission of flame or expulsion of molten metal						No		P		
- Electric strength tests of equipment after completion of tests						No		P		
Supplementary information: Renata CR1632, Lithium 3 V, 137 mAh										

Annex M.4	Table: Additional safeguards for equipment containing secondary lithium batteries					N/A
Battery/Cell No.	Test conditions	Measurements			Observation	
		U	I (A)	Temp (C)		
	Normal					
	Abnormal					
	Single fault –SC/OC					
	Normal					
	Abnormal					
	Single fault – SC/OC					
Supplementary Information:						

Battery identification	Charging at $T_{lowest}$ (°C)	Observation	Charging at $T_{highest}$ (°C)	Observation
Supplementary Information:				

Annex Q.1	TABLE: Circuits intended for interconnection with building wiring (LPS)					N/A	
Note: Measured UOC (V) with all load circuits disconnected:							
Output Circuit	Components	U <sub>oc</sub> (V)	I <sub>sc</sub> (A)		S (VA)		
			Meas.	Limit	Meas.	Limit	
Supplementary Information: SC=Short circuit, OC=Open circuit							

T.2, T.3, T.4, T.5	TABLE: Steady force test					P
Part/Location	Material	Thickness (mm)	Force (N)	Test Duration (sec)	Observation	
Internal wire	PVC	---	10	5	No hazard	
Revision with ASA/PC enclosure material tested but never went into series production						
Enclosure	ASA/PC	Min. 2.5	30	5	No hazard	
Enclosure	ASA/PC	Min. 2.5	250	5	No hazard	
From revision A01 onwards						
Enclosure	PC	Min. 2.5	30	5	No hazard	
Enclosure	PC	Min. 2.5	250	5	No hazard	
Supplementary information:						

T.6, T.9	TABLE: Impact tests				P
Part/Location	Material	Thickness (mm)	Vertical distance (mm)	Observation	
Revision with ASA/PC enclosure material tested but never went into series production					
Whole product	ASA/PC	Min. 2.5	1'300	No cracks visible, no hazard	
From revision A01 onwards					
Whole product	PC	Min. 2.5	1'300	No cracks visible, no hazard	
Supplementary information:					

T.7	TABLE: Drop tests				N/A
Part/Location	Material	Thickness (mm)	Drop Height (mm)	Observation	
Supplementary information: Fixed device					

T.8	TABLE: Stress relief test					P
Part/Location	Material	Thickness (mm)	Oven Temperature (°C)	Duration (h)	Observation	
Revision with ASA/PC enclosure material tested but never went into series production						
Cover	ASA/PC	Min. 2.5	95	7	Minor deformations, but no openings have been resulted	
From revision A01 onwards						
Cover	PC	Min. 2.5	105	7	No deformations	
Supplementary information:						

**List of test equipment used:**

A completed list of used test equipment shall be provided in the Test Reports when a Manufacturer Testing Laboratory according to TMP/CTF stage 1 or WMT/CTF stage 2 procedure has been used.

Clause	Measurement / testing	Testing / measuring equipment / material used	Inventory no	Last calibration	Calibration due
all	Ambient conditions	Comet Systems, PCE-T7610, Thermo-/Hygro-/Barometer	18.6632.04	03/2019	03/2020
5.2, 6.2, B.2.5, B.3, B.4	Electrical data, fault condition tests	Fluke, 189, Digital Multimeter	DV9771	12/2018	12/2019
5.2, 6.2, B.2.5, B.3, B.4	Electrical data, fault condition tests	Fluke, 189, Digital Multimeter	DV9992	08/2018	08/2019
5.2, 6.2, B.2.5, B.3, B.4	Electrical data, fault condition tests	Fluke, 87, Digital Multimeter	DV6681	04/2018	04/2019
5.4.1.4, 6.3.2, 9.0, B.2.6	Temperature measurements, fault condition tests	Fluke, 52, Digital Thermometer for K/J Thermocouples	18.6722.04	03/2018	03/2019
5.4.1.4, 6.3.2, 9.0, B.2.6	Temperature measurements, fault condition tests	Omega, TC-K 0.01, Thermocouples	18.6632.08.1, 18.6632.08.2, 18.6632.08.3, 18.6632.08.4, 18.6632.08.5	05/2018	05/2021
5.4.2, 5.4.3	Clearances, creepage distances	Etalon, 0 - 150 mm, Caliper Gauge	M9702	11/2018	11/2019
5.4.9, 5.5.10	Electric strength tests	ETL, ATS400, High Voltage Tester	14.6632.03	08/2018	08/2019 <sup>1)</sup>
T.6, T.9	Impact test	Impact Tester	MG5603	09/2017	09/2020
T.6, T.9	Impact test	Futuro, Tri-Matic 3 m, Tape measure	12.6632.14	11/2015	11/2018

<sup>1)</sup> Electric strength tests carried out while 05/2019, all other measurements during 03/2019.

<b>ATTACHMENT TO TEST REPORT</b> <b>IEC 62368-1</b> <b>EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES</b> (Audio/video, information and communication technology equipment Part 1: Safety requirements)	
Differences according to :	EN 62368-1:2014+A11:2017
Attachment Form No. :	EU_GD_IEC62368_1B_II
<b>Attachment Originator :</b>	<b>Nemko AS</b>
Master Attachment:	Date 2017-09-22
<b>Copyright © 2017 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.</b>	

IEC62368_1B - ATTACHMENT																																										
Clause	Requirement + Test			Result - Remark		Verdict																																				
	<b>CENELEC COMMON MODIFICATIONS (EN)</b>					P																																				
	Clauses, subclauses, notes, tables, figures and annexes which are additional to those in IEC 62368-1:2014 are prefixed “Z”.					P																																				
CONTENTS	<b>Add</b> the following annexes: Annex ZA (normative) Normative references to international publications with their corresponding European publications Annex ZB (normative) Special national conditions Annex ZC (informative) A-deviations Annex ZD (informative) IEC and CENELEC code designations for flexible cords					P																																				
	<b>Delete</b> all the “country” notes in the reference document (IEC 62368-1:2014) according to the following list: <table><tr><td>0.2.1</td><td>Note</td><td>1</td><td>Note 3</td><td>4.1.15</td><td>Note</td></tr><tr><td>4.7.3</td><td>Note 1 and 2</td><td>5.2.2.2</td><td>Note</td><td>5.4.2.3.2.2 Table 13</td><td>Note c</td></tr><tr><td>5.4.2.3.2.4</td><td>Note 1 and 3</td><td>5.4.2.5</td><td>Note 2</td><td>5.4.5.1</td><td>Note</td></tr><tr><td>5.5.2.1</td><td>Note</td><td>5.5.6</td><td>Note</td><td>5.6.4.2.1</td><td>Note 2 and 3</td></tr><tr><td>5.7.5</td><td>Note</td><td>5.7.6.1</td><td>Note 1 and 2</td><td>10.2.1 Table 39</td><td>Note 2, 3 and 4</td></tr><tr><td>10.5.3</td><td>Note 2</td><td>10.6.2.1</td><td>Note 3</td><td>F.3.3.6</td><td>Note 3</td></tr></table>					0.2.1	Note	1	Note 3	4.1.15	Note	4.7.3	Note 1 and 2	5.2.2.2	Note	5.4.2.3.2.2 Table 13	Note c	5.4.2.3.2.4	Note 1 and 3	5.4.2.5	Note 2	5.4.5.1	Note	5.5.2.1	Note	5.5.6	Note	5.6.4.2.1	Note 2 and 3	5.7.5	Note	5.7.6.1	Note 1 and 2	10.2.1 Table 39	Note 2, 3 and 4	10.5.3	Note 2	10.6.2.1	Note 3	F.3.3.6	Note 3	P
0.2.1	Note	1	Note 3	4.1.15	Note																																					
4.7.3	Note 1 and 2	5.2.2.2	Note	5.4.2.3.2.2 Table 13	Note c																																					
5.4.2.3.2.4	Note 1 and 3	5.4.2.5	Note 2	5.4.5.1	Note																																					
5.5.2.1	Note	5.5.6	Note	5.6.4.2.1	Note 2 and 3																																					
5.7.5	Note	5.7.6.1	Note 1 and 2	10.2.1 Table 39	Note 2, 3 and 4																																					
10.5.3	Note 2	10.6.2.1	Note 3	F.3.3.6	Note 3																																					
	For special national conditions, see Annex ZB.					P																																				
1	<b>Add</b> the following note: NOTE Z1 The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2011/65/EU.					P																																				

IEC62368_1B - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
4.Z1	<p><b>Add</b> the following new subclause after 4.9: To protect against excessive current, short-circuits and earth faults in circuits connected to an a.c. <b>mains</b>, protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c):</p> <p>a) except as detailed in b) and c), protective devices necessary to comply with the requirements of B.3.1 and B.4 shall be included as parts of the equipment;</p> <p>b) for components in series with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation;</p> <p>c) it is permitted for <b>pluggable equipment type B</b> or <b>permanently connected equipment</b>, to rely on dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions.</p> <p>If reliance is placed on protection in the building installation, the installation instructions shall so state, except that for <b>pluggable equipment type A</b> the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.</p>		N/A
5.4.2.3.2.4	<p><b>Add</b> the following to the end of this subclause: The requirement for interconnection with <b>external circuit</b> is in addition given in EN 50491-3:2009.</p>		P
10.2.1	<p><b>Add</b> the following to c) and d) in table 39: For additional requirements, see 10.5.1.</p>		N/A

IEC62368_1B - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
10.5.1	<p><b>Add</b> the following after the first paragraph:  <i>For RS 1 compliance is checked by measurement under the following conditions:</i>  <i>In addition to the normal operating conditions, all controls adjustable from the outside by hand, by any object such as a tool or a coin, and those internal adjustments or presets which are not locked in a reliable manner, are adjusted so as to give maximum radiation whilst maintaining an intelligible picture for 1 h, at the end of which the measurement is made.</i>            NOTE Z1 Soldered joints and paint lockings are examples of adequate locking.  <i>The dose-rate is determined by means of a radiation monitor with an effective area of 10 cm<sup>2</sup>, at any point 10 cm from the outer surface of the apparatus.</i>  <i>Moreover, the measurement shall be made under fault conditions causing an increase of the high-voltage, provided an intelligible picture is maintained for 1 h, at the end of which the measurement is made.</i>  <i>For RS1, the dose-rate shall not exceed 1 µSv/h taking account of the background level.</i>            NOTE Z2 These values appear in Directive 96/29/Euratom of 13 May 1996.</p>		N/A
10.6.1	<p><b>Add</b> the following paragraph to the end of the subclause:            EN 71-1:2011, 4.20 and the related tests methods and measurement distances apply.</p>		N/A
10.Z1	<p><b>Add</b> the following new subclause after 10.6.5.  <b>10.Z1 Non-ionizing radiation from radio frequencies in the range 0 to 300 GHz</b>            The amount of non-ionizing radiation is regulated by European Council Recommendation 1999/519/EC of 12 July 1999 on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz).            For intentional radiators, ICNIRP guidelines should be taken into account for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz). For hand-held and body-mounted devices, attention is drawn to EN 50360 and EN 50566</p>	Due to the EMC tests	P
G.7.1	<p><b>Add</b> the following note:            NOTE Z1 The harmonized code designations corresponding to the IEC cord types are given in Annex ZD.</p>		N/A



IEC62368_1B - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
Bibliography	<p><b>Add</b> the following standards:</p> <p><b>Add</b> the following notes for the standards indicated:</p> <p>IEC 60130-9 NOTE Harmonized as EN 60130-9.</p> <p>IEC 60269-2 NOTE Harmonized as HD 60269-2.</p> <p>IEC 60309-1 NOTE Harmonized as EN 60309-1.</p> <p>IEC 60364 NOTE some parts harmonized in HD 384/HD 60364 series.</p> <p>IEC 60601-2-4 NOTE Harmonized as EN 60601-2-4.</p> <p>IEC 60664-5 NOTE Harmonized as EN 60664-5.</p> <p>IEC 61032:1997 NOTE Harmonized as EN 61032:1998 (not modified).</p> <p>IEC 61508-1 NOTE Harmonized as EN 61508-1.</p> <p>IEC 61558-2-1 NOTE Harmonized as EN 61558-2-1.</p> <p>IEC 61558-2-4 NOTE Harmonized as EN 61558-2-4.</p> <p>IEC 61558-2-6 NOTE Harmonized as EN 61558-2-6.</p> <p>IEC 61643-1 NOTE Harmonized as EN 61643-1.</p> <p>IEC 61643-21 NOTE Harmonized as EN 61643-21.</p> <p>IEC 61643-311 NOTE Harmonized as EN 61643-311.</p> <p>IEC 61643-321 NOTE Harmonized as EN 61643-321.</p> <p>IEC 61643-331 NOTE Harmonized as EN 61643-331.</p>		N/A

IEC62368_1B - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
<b>ZB</b>	<b>ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)</b>		N/A
4.1.15	<p><b>Denmark, Finland, Norway and Sweden</b></p> <p>To the end of the subclause the following is added:</p> <p><b>Class I pluggable equipment type A</b> intended for connection to other equipment or a network shall, if safety relies on connection to reliable earthing or if surge suppressors are connected between the network terminals and <b>accessible</b> parts, have a marking stating that the equipment shall be connected to an earthed <b>mains</b> socket-outlet.</p> <p>The marking text in the applicable countries shall be as follows:</p> <p>In <b>Denmark</b>: "Apparatets stikprop skal tilsluttes en stikkontakt med jord som giver forbindelse til stikproppens jord."</p> <p>In <b>Finland</b>: "Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan"</p> <p>In <b>Norway</b>: "Apparatet må tilkoples jordet stikkontakt"</p> <p>In <b>Sweden</b>: "Apparaten skall anslutas till jordat uttag"</p>		N/A
4.7.3	<p><b>United Kingdom</b></p> <p>To the end of the subclause the following is added:</p> <p>The torque test is performed using a socket-outlet complying with BS 1363, and the plug part shall be assessed to the relevant clauses of BS 1363.</p> <p>Also see Annex G.4.2 of this annex</p>		N/A

IEC62368_1B - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
5.2.2.2	<b>Denmark</b> After the 2nd paragraph add the following: A warning (marking <b>safeguard</b> ) for high <b>touch current</b> is required if the <b>touch current</b> exceeds the limits of 3,5 mA a.c. or 10 mA d.c		N/A
5.4.11.1 and Annex G	<b>Finland and Sweden</b> To the end of the subclause the following is added: For separation of the telecommunication network from earth the following is applicable: If this insulation is solid, including insulation forming part of a component, it shall at least consist of either <ul style="list-style-type: none"> <li>• two layers of thin sheet material, each of which shall pass the electric strength test below, or</li> <li>• one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below.</li> </ul> If this insulation forms part of a semiconductor component (e.g. an optocoupler), there is no distance through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that clearances and creepage distances do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition <ul style="list-style-type: none"> <li>• passes the tests and inspection criteria of 5.4.8 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 5.4.9 shall be performed using 1.5 kV), and</li> <li>• is subject to routine testing for electric strength during manufacturing, using a test voltage of 1,5kV.</li> </ul> It is permitted to bridge this insulation with a capacitor complying with EN 60384-14:2005, subclass Y2. A capacitor classified Y3 according to EN 60384-14:2005, may bridge this insulation under the following conditions: <ul style="list-style-type: none"> <li>• the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 60384-14, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in 5.4.11;</li> <li>• the additional testing shall be performed on all the test specimens as described in EN 60384-14; the impulse test of 2,5 kV is to be performed before the endurance test in EN 60384-14, in the sequence of tests as described in EN 60384-14.</li> </ul>		N/A
5.5.2.1	<b>Norway</b> After the 3rd paragraph the following is added: Due to the IT power system used, capacitors are required to be rated for the applicable line-to-line voltage (230 V).		N/A

IEC62368_1B - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
5.5.6	<b>Finland, Norway and Sweden</b> To the end of the subclause the following is added: Resistors used as <b>basic safeguard</b> or bridging <b>basic insulation</b> in <b>class I pluggable equipment type A</b> shall comply with G.10.1 and the test of G.10.2.		N/A
5.6.1	<b>Denmark</b> <b>Add</b> to the end of the subclause Due to many existing installations where the socket-outlets can be protected with fuses with higher rating than the rating of the socket-outlets the protection for pluggable equipment type A shall be an integral part of the equipment. <i>Justification:</i> In Denmark an existing 13 A socket outlet can be protected by a 20 A fuse.		N/A
5.6.4.2.1	<b>Ireland and United Kingdom</b> After the indent for <b>pluggable equipment type A</b> , the following is added: – the <b>protective current rating</b> is taken to be 13 A, this being the largest rating of fuse used in the <b>mains</b> plug.		N/A
5.6.5.1	To the second paragraph the following is added: The range of conductor sizes of flexible cords to be accepted by terminals for equipment with a rated current over 10 A and up to and including 13 A is: 1.25 mm <sup>2</sup> to 1.5 mm <sup>2</sup> in cross-sectional area.		N/A
5.7.5	<b>Denmark</b> To the end of the subclause the following is added: The installation instruction shall be affixed to the equipment if the <b>protective conductor current</b> exceeds the limits of 3.5 mA a.c. or 10 mA d.c.		N/A

IEC62368_1B - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
5.7.6.1	<p><b>Norway and Sweden</b></p> <p>To the end of the subclause the following is added:</p> <p>The screen of the television distribution system is normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation needs to be isolated from the screen of a cable distribution system.</p> <p>It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by a retailer, for example.</p> <p>The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in:</p> <p>“Apparatus connected to the protective earthing of the building installation through the mains connection or through other apparatus with a connection to protective earthing – and to a television distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a television distribution system therefore has to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11)”</p> <p>NOTE In Norway, due to regulation for CATV-installations, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min.</p> <p>Translation to Norwegian (the Swedish text will also be accepted in Norway):</p> <p>“Apparater som er koplet til beskyttelsesjord via nettplugg og/eller via annet jordtilkoplet utstyr – og er tilkoplet et koaksialbasert kabel-TV nett, kan forårsake brannfare. For å unngå dette skal det ved tilkopling av apparater til kabel-TV nett installeres en galvanisk isolator mellom apparatet og kabel-TV nettet.”</p> <p>Translation to Swedish:</p> <p>”Apparater som är kopplad till skyddsjord via jordat vägguttag och/eller via annan utrustning och samtidigt är kopplad till kabel-TV nät kan i vissa fall medföra risk för brand. För att undvika detta skall vid anslutning av apparaten till kabel-TV nät galvanisk isolator finnas mellan apparaten och kabel-TV nätet.”.</p>		N/A
5.7.6.2	<p><b>Denmark</b></p> <p>To the end of the subclause the following is added:</p> <p>The warning (marking safeguard) for high touch current is required if the touch current or the protective current exceed the limits of 3.5 mA .</p>		N/A

IEC62368_1B - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
B.3.1 and B.4	<p><b>Ireland and United Kingdom</b></p> <p>The following is applicable:</p> <p>To protect against excessive currents and short-circuits in the primary circuit of <b>direct plug-in equipment</b>, tests according to Annexes B.3.1 and B.4 shall be conducted using an external miniature circuit breaker complying with EN 60898-1, Type B, rated 32A. If the equipment does not pass these tests, suitable protective devices shall be included as an integral part of the <b>direct plug-in equipment</b>, until the requirements of Annexes B.3.1 and B.4 are met</p>		N/A
G.4.2	<p><b>Denmark</b></p> <p>To the end of the subclause the following is added:</p> <p>Supply cords of single phase appliances having a rated current not exceeding 13 A shall be provided with a plug according to DS 60884-2-D1:2011.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.</p> <p>If a single-phase equipment having a RATED CURRENT exceeding 13 A or if a poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-2.</p> <p>Mains socket outlets intended for providing power to Class II apparatus with a rated current of 2,5 A shall be in accordance DS 60884-2-D1:2011 standard sheet DKA 1-4a.</p> <p>Other current rating socket outlets shall be in compliance with Standard Sheet DKA 1-3a or DKA 1-1c.</p> <p>Mains socket-outlets with earth shall be in compliance with DS 60884-2-D1:2011 Standard Sheet DK 1-3a, DK 1-1c, DK1-1d, DK 1-5a or DK 1-7a</p> <p><i>Justification:</i></p> <p>Heavy Current Regulations, Section 6c</p>		N/A
G.4.2	<p><b>United Kingdom</b></p> <p>To the end of the subclause the following is added:</p> <p>The plug part of direct plug-in equipment shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.13, 12.16, and 12.17, except that the test of 12.17 is performed at not less than 125 °C. Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply.</p>		N/A

IEC62368_1B - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
G.7.1	<b>United Kingdom</b> To the first paragraph the following is added: Equipment which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord shall be fitted with a 'standard plug' in accordance with the Plugs and Sockets etc (Safety) Regulations 1994, Statutory Instrument 1994 No. 1768, unless exempted by those regulations. NOTE "Standard plug" is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.		N/A
G.7.1	<b>Ireland</b> To the first paragraph the following is added: Apparatus which is fitted with a flexible cable or cord shall be provided with a plug in accordance with Statutory Instrument 525: 1997, "13 A Plugs and Conversion Adapters for Domestic Use Regulations: 1997. S.I. 525 provides for the recognition of a standard of another Member State which is equivalent to the relevant Irish Standard		N/A
G.7.2	<b>Ireland and United Kingdom:</b> To the first paragraph the following is added: A power supply cord with a conductor of 1,25 mm <sup>2</sup> is allowed for equipment which is rated over 10 A and up to and including 13 A.		N/A

IEC62368_1B - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
<b>ZC</b>	<b>ANNEX ZC, NATIONAL DEVIATIONS (EN)</b>		N/A
10.5.2	<b>Germany</b> The following requirement applies: For the operation of any cathode ray tube intended for the display of visual images operating at an acceleration voltage exceeding 40 kV, authorization is required, or application of type approval (Bauartzulassung) and marking. <i>Justification:</i> German ministerial decree against ionizing radiation (Röntgenverordnung), in force since 2002-07-01, implementing the European Directive 96/29/EURATOM. <b>NOTE</b> Contact address: Physikalisch-Technische Bundesanstalt, Bundesallee 100, D-38116 Braunschweig, Tel.: Int +49-531-592-6320, Internet: <a href="http://www.ptb.de">http://www.ptb.de</a>		N/A



## ATTACHMENT TO TEST REPORT IEC 62368-1

### Pictures of the EUT




### NG800, total view




### NG800, rear view



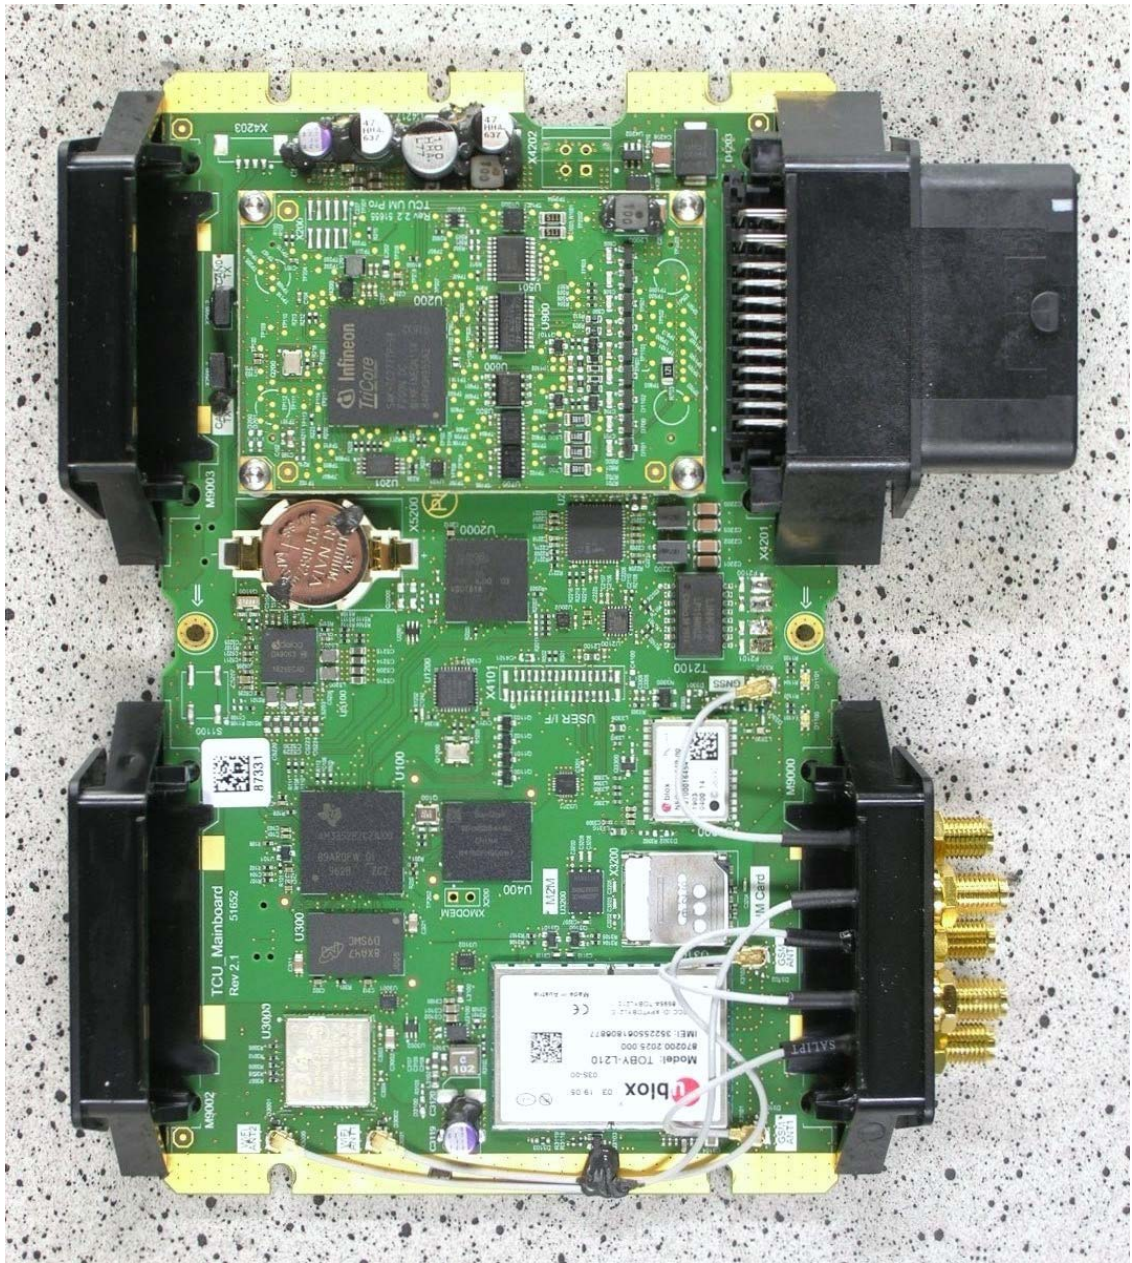

Mainboard, top view



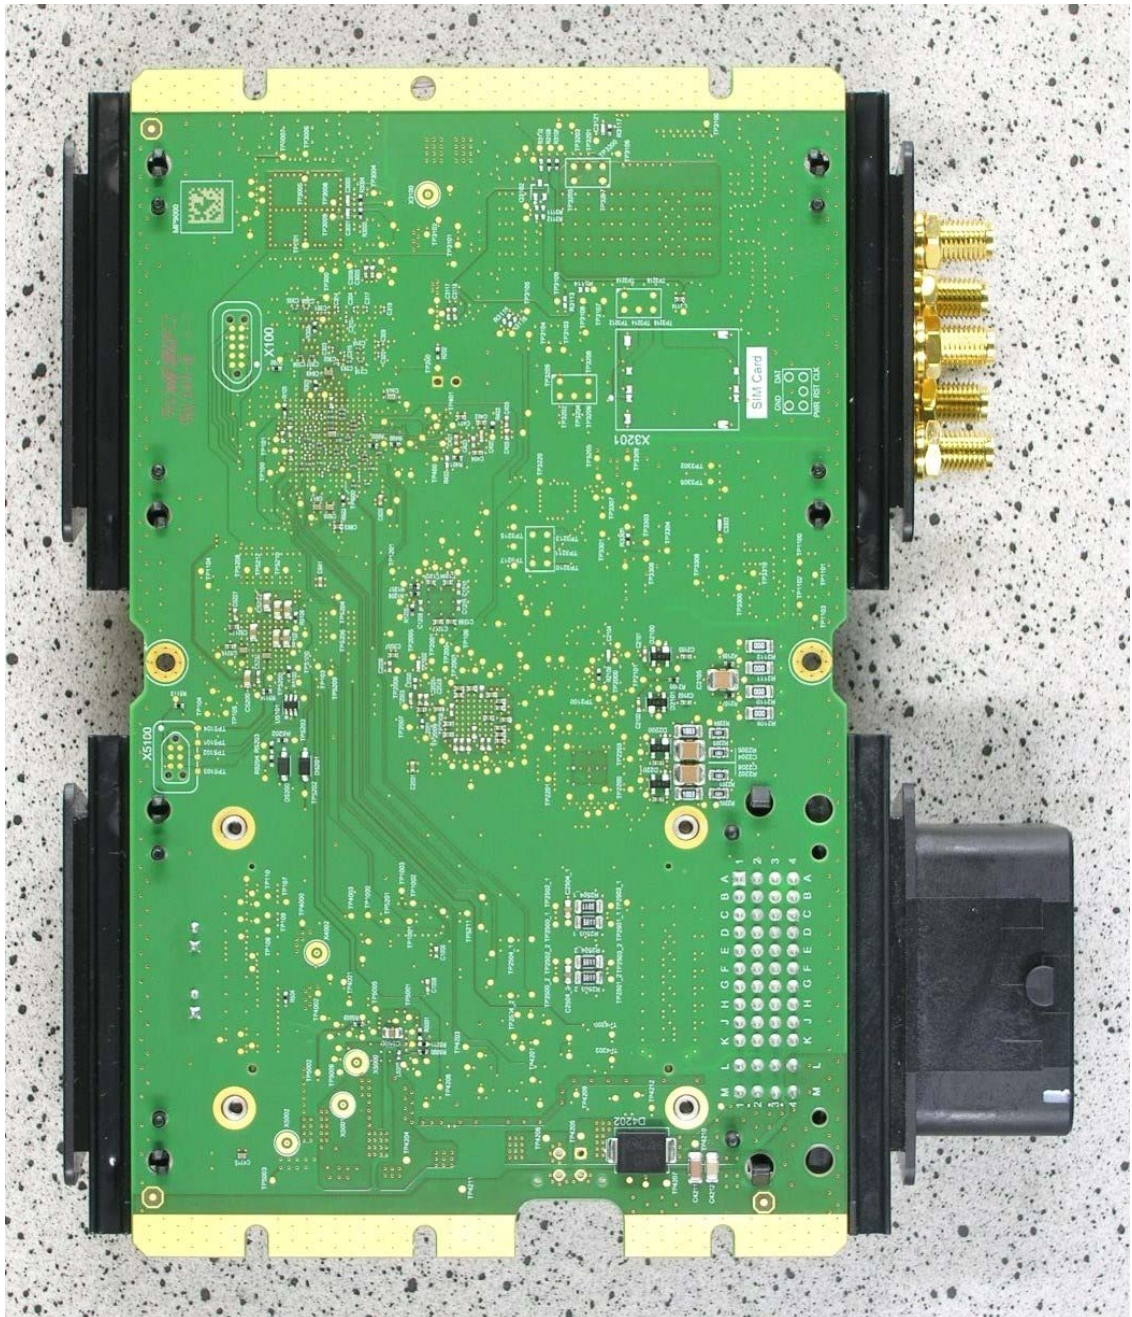

Mainboard, bottom view



Mainboard, detail view of markings